

目 录

华翰物流API文档

版本信息

公共请求参数

createOrder (创建订单)

batchCreateOrder (批量创建订单)

getCargoTrack (轨迹查询)

modifyOrderWeight (修改订单重量)

getTrackNumber (查询跟踪号)

getShippingMethod (获取配送方式)

getLabelUrl (获取标签)

batchGetLabelUrl (批量获取标签)

cancelOrder (取消订单)

getOrder (查询订单)

feeTrail (运费试算)

interceptOrder (拦截订单)

getOrderFee (订单费用查询)

getBillingWeight (获取订单实际计费重)

getLastTrackCode(PDD专用-获取派送商信息)

getCargoTrackPdd(PDD专用-轨迹查询)

createFbaOrder (创建FBA订单接口)

batchGetDeliveryProof(批量获取发货证明)

getFbaLabel(批量获取FBA标签)

华翰物流API文档

深圳市华翰鸿运国际物流技术有限公司

API接口文档V2.2

http code请求示例

```
POST /default/svc/web-service HTTP/1.1
Host: 127.0.0.1
Content-Type: application/xml
<?xml version="1.0" encoding="utf-8"?>
<SOAP-ENV:Envelope xmlns:SOAP-ENV="http://schemas.xmlsoap.org/soap/envelope/" xmlns:ns1="http://www.example.org/Ec/">
  <SOAP-ENV:Body>
    <ns1:callService>
      <paramsJson>{"codes":["GV436479377GB"]}</paramsJson>
      <appToken>123</appToken>
      <appKey>456</appKey>
      <service>getCargoTrack</service>
    </ns1:callService>
  </SOAP-ENV:Body>
</SOAP-ENV:Envelope>
```

PHP code 1请求示例

```
<?php
$curl = curl_init();

curl_setopt_array($curl, array(
  CURLOPT_URL => "http://127.0.0.1/default/svc/web-service",
  CURLOPT_RETURNTRANSFER => true,
  CURLOPT_ENCODING => "",
  CURLOPT_MAXREDIRS => 10,
  CURLOPT_TIMEOUT => 0,
  CURLOPT_FOLLOWLOCATION => true,
  CURLOPT_HTTP_VERSION => CURL_HTTP_VERSION_1_1,
  CURLOPT_CUSTOMREQUEST => "POST",
  CURLOPT_POSTFIELDS => "<?xml version='1.0' encoding='utf-8'?>\r\n<SO
```

```

AP-ENV:Envelope xmlns:SOAP-ENV=\"http://schemas.xmlsoap.org/soap/envelope
/\\" xmlns:ns1=\"http://www.example.org/Ec/\"> \r\n  <SOAP-ENV:Body> \r\n
<ns1:callService> \r\n    <paramsJson>{\"codes\":[\"GV436479377GB\"]}</
paramsJson> \r\n    <appToken>123</appToken> \r\n    <appKey>456</a
ppKey> \r\n    <service>getCargoTrack</service> \r\n  </ns1:callServ
ice> \r\n  </SOAP-ENV:Body> \r\n</SOAP-ENV:Envelope>\r\n\",
CURLOPT_HTTPHEADER => array(
  \"Content-Type: application/xml\"
),
));

$response = curl_exec($curl);

curl_close($curl);
echo $response;
?>

```

PHP code 2 请求示例

```

<?php
$params = array(
    'codes' => array('GV436479377GB')
);
$req = array(
    'service' => 'getCargoTrack',
    'paramsJson' => json_encode($params),
    'appToken' => '123',
    'appKey' => '456'
);
$options = array (
    \"trace\" => true,
    \"connection_timeout\" => 1000,
    \"encoding\" => \"utf-8\"
);

$wsdl = 'http://127.0.0.1/default/svc/wsdl';

try {
    $client = new SoapClient ( $wsdl, $options );
    $result = $client->callService($req);
} catch (Exception $e) {
    echo $e->getMessage();
}
print_r($result);
?>

```

C# code 请求示例

```
var client = new RestClient("http://127.0.0.1/default/svc/web-service");
client.Timeout = -1;
var request = new RestRequest(Method.POST);
request.AddHeader("Content-Type", "application/xml");
request.AddParameter("application/xml", "<?xml version='1.0' encoding='utf-8'>\r\n<SOAP-ENV:Envelope xmlns:SOAP-ENV='http://schemas.xmlsoap.org/soap/envelope/' xmlns:ns1='http://www.example.org/Ec/'> \r\n<SOAP-ENV:Body> \r\n    <ns1:callService> \r\n        <paramsJson>{\"codes\": [\"GV436479377GB\"]}</paramsJson> \r\n        <appToken>123</appToken> \r\n        <appKey>456</appKey> \r\n        <service>getCargoTrack</service> \r\n    </ns1:callService> \r\n</SOAP-ENV:Body> \r\n</SOAP-ENV:Envelope>\r\n", ParameterType.RequestBody);
IRestResponse response = client.Execute(request);
Console.WriteLine(response.Content);
```

版本信息

版本信息

| 版本 | 修改日期 | 修改人 | 修改内容 |
|-----|------------|-----|-----------------|
| 1.0 | 2020/01/07 | 蔡兆锡 | 新建文档 |
| 1.1 | 2020/06/09 | 蔡兆锡 | 创建订单增加长宽高字段 |
| 1.2 | 2020/08/15 | 江杰军 | 更新部分字段描述 |
| 1.3 | 2020/09/03 | 蔡兆锡 | 新增批量打印标签 |
| 1.3 | 2020/09/03 | 江杰军 | 完善批量打印标签注解 |
| 1.4 | 2020/09/10 | 蔡兆锡 | 新增订单费用查询接口 |
| 1.5 | 2020/09/10 | 蔡兆锡 | 创建订单增加申报材质字段 |
| 1.6 | 2020/12/21 | 蔡兆锡 | 创建订单增加发件人税号字段 |
| 1.7 | 2021/1/15 | 蔡兆锡 | 申报明细增加申报材质和用途字段 |
| 1.8 | 2021/03/08 | 江杰军 | 增加显示轨迹状态代码说明 |
| 1.9 | 2021/06/18 | 蔡兆锡 | 新增字段欧盟税号 |
| 2.0 | 2022/05/31 | 江杰军 | 完善相关字段说明 |
| 2.1 | 2022/12/26 | 江杰军 | 增加PDD相关定制接口 |

公共请求参数

简要描述：

API公共请求参数说明

请求地址:

WebServices地址(如果用soap方法做对接，就用这个地址)

<http://api.hh-exp.com/default/svc/wsdl>

webApi地址(如果用curl方法做对接，就用这个地址，该地址支持postman请求)建议使用此模式

<http://api.hh-exp.com/default/svc/web-service>


注：此接口地址就是正式环境地址.

特别说明：不可以使用该接口域名进行客户端登陆操作(会出现无法登陆等异常)，此地址是专门给API接口使用！华翰客户端地址：http://www.hhddb.com 客户端应该使用此地址登陆操作！切记！！

请求公共参数:

| 参数名 | 类型 | 必填项 | 描述 |
|------------|--------|-----|---|
| appToken | String | √ | API账号 |
| appKey | String | √ | API密码 |
| service | String | √ | 接口方法，参考接口列表中service名称 |
| paramsJson | String | √ | 请求的数据内容（json格式）， 参考接口列表中paramsJson示例说明 |

注：API账户密码是使用您在我司开户账号密码，登陆我司客户端：www.hhddb.com 生成对接的API账号密码 [步骤：登陆->API设置->添加]

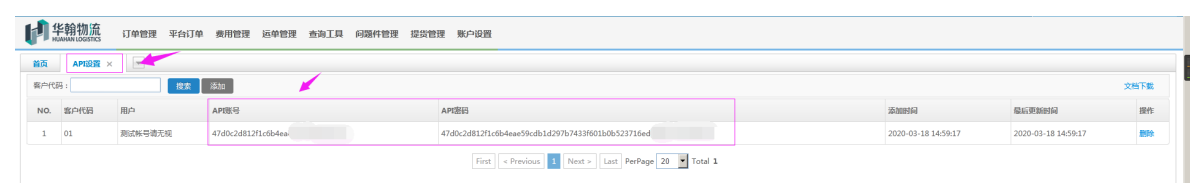

请求XML:

```
<?xml version="1.0" encoding="UTF-8"?>
<SOAP-ENV:Envelope xmlns:SOAP-ENV="http://schemas.xmlsoap.org/soap/envelope/" xmlns:ns1="http://www.example.org/Ec/">
  <SOAP-ENV:Body>
    <ns1:callService>
      <paramsJson>{json}</paramsJson>
      <appToken>appToken</appToken>
      <appKey>appKey</appKey>
      <service>{service}</service>
    </ns1:callService>
  </SOAP-ENV:Body>
</SOAP-ENV:Envelope>
```

响应公共参数:

| 参数名 | 类型 | 必填项 | 描述 |
|---------|--------|-----|------------------------------|
| ask | String | √ | 响应标志，Success表示成功，Failure表示失败 |
| message | String | √ | 消息提示 |
| Error | Object | | 错误信息 |

Error格式:

| 参数名 | 类型 | 必填项 | 描述 |
|------------|--------|-----|--------|
| errMessage | String | √ | 错误信息内容 |
| errCode | String | √ | 错误码 |

pagination格式:

| 参数名 | 类型 | 必填项 | 描述 |
|----------|--------|-----|------|
| pageSize | String | √ | 分页大小 |
| page | String | √ | 当前页 |

响应XML:

```
<?xml version="1.0" encoding="UTF-8"?>
<SOAP-ENV:Envelope xmlns:SOAP-ENV="http://schemas.xmlsoap.org/soap/envelope/" xmlns:ns1="http://www.example.org/Ec/">
  <SOAP-ENV:Body>
    <ns1:callServiceResponse>
      <response>{json}</response>
    </ns1:callServiceResponse>
  </SOAP-ENV:Body>
</SOAP-ENV:Envelope>
```

备注:

如果JSON里面有"<"和"&",请转义成对应的XML实体。

createOrder (创建订单)

简要描述：

创建订单接口

service名称:

createOrder

paramsJson示例：

```
{
  "reference_no": "WWTEST202001084545",
  "shipping_method": "B测试产品",
  "country_code": "US",
  "order_weight": 1,
  "order_pieces": "1",
  "length":1,
  "width":1,
  "height":1,
  "Consignee": {
    "consignee_street": "19 N Long Ave",
    "consignee_street2": "",
    "consignee_name": "Xiao Cai",
    "consignee_telephone": "958465448",
    "consignee_postcode": "60644-3224",
    "consignee_province": "Illinois",
    "consignee_city": "Chicago",
    "consignee_taxno": "TA2020181245",
    "consignee_email": "9586645845@qq.com",
    "IOSS":"IM5280002079"
  },
  "Shipper": {
    "shipper_countrycode": "CN",
    "shipper_province": "GUANGDONG",
    "shipper_city": "SHENZHEN",
    "shipper_street": "pinghu 55 SHENZHEN GUANGDONG",
    "shipper_postcode": "518000",
    "shipper_name": "hh cai",
    "shipper_telephone": "9586458745",
  }
}
```

```
    "shipper_mobile": "18011911234",
    "shipper_taxno": "FAFA8181AA"
  },
  "ItemArr": [{
    "invoice_cnname": "手机外壳1",
    "invoice_enname": "Mobile phone shell1",
    "invoice_weight": 0.8,
    "invoice_quantity": "3",
    "invoice_unitcharge": 3.5,
    "sku": "4644392",
    "invoice_url": "http://www.aliexpress.com/item//4000599110017.htm
1"
  }, {
    "invoice_cnname": "手机外壳2",
    "invoice_enname": "Mobile phone shell2",
    "invoice_weight": 0.8,
    "invoice_quantity": "3",
    "invoice_unitcharge": 3.5,
    "sku": "4644392",
    "invoice_url": "http://www.aliexpress.com/item//4000599110017.htm
1"
  }
  ]
}
```

paramsJson参数:

| 参数名 | 数据类型 | 是否必填 | 说明 |
|-----------------|--------|---------|--|
| reference_no | string | Require | 客户参考号(客户自定义单号，不能重复，需唯一) |
| shipping_method | string | Require | 配送方式（产品代码） 可以通过“获取配送方式”接口获取列表， 也可以访问我司产品代码网站 http://www.hh-exp.cn/ProductCode/index.php 手工查询 |
| country_code | string | Require | 收件人国家二字码 |
| extra_service | string | Option | 附加服务代码， 每个以英文分号“;”隔开 |
| order_weight | float | Require | 订单重量，单位KG |

| 参数名 | 数据类型 | 是否必填 | 说明 |
|--------------------|--------|--------|---|
| shipping_method_no | string | Option | 服务商单号（追踪单号，默认不需要传值，由华翰接口返回） |
| order_pieces | int | Option | 外包装件数，默认1（ 小包默认值1即可 ，发FBA空海运等一票货多箱的时候才需要根据情况设置）这个字段不是数量不要传错。 |
| insurance_value | float | Option | 投保金额，默认RMB |
| mail_cargo_type | string | Option | 包裹申报种类（1-Gif礼品；2-CommercialSample商品货样；3-Document文件；4-Other其他。默认4） |
| length | float | Option | 长，单位cm，默认1 |
| width | float | Option | 宽，单位cm，默认1 |
| height | float | Option | 高，单位cm，默认1 |

| | | | |
|-----------|--------------|---------|--------|
| Consignee | Object | Require | 收件人信息 |
| Shipper | Object | Require | 发件人信息 |
| ItemArr | Object/Array | Require | 海关申报信息 |

Consignee参数

| 参数名 | 数据类型 | 是否必填 | 说明 |
|--------------------|--------|---------|--------|
| consignee_company | string | Option | 收件人公司名 |
| consignee_province | string | Option | 收件人省 |
| consignee_city | string | Option | 收件人城市 |
| consignee_street | string | Require | 收件人地址1 |
| consignee_street2 | string | Option | 收件人地址2 |
| consignee_street3 | string | Option | 收件人地址3 |

| 参数名 | 数据类型 | 是否必填 | 说明 |
|---------------------------|--------|---------|--------------------|
| consignee_street | string | Option | 收件人地址 |
| consignee_postcode | string | Option | 收件人邮编 |
| consignee_name | string | Require | 收件人姓名 |
| consignee_telephone | string | Option | 收件人电话 |
| consignee_mobile | string | Option | 收件人手机 |
| consignee_email | string | Option | 收件人邮箱 |
| consignee_certificatetype | string | Option | 证件类型（ID-身份证；PP-护照） |
| consignee_certificatecode | string | Option | 证件号码 |

| | | | |
|------------------------------|--------|--------|---|
| consignee_credentials_period | string | Option | 证件有效期， 格式：2014-04-15 |
| consignee_doorplate | string | Option | 收件人门牌号（ 注意：除一些特殊专线产品要求单独上传门牌号外，门牌号直接放地址里面即可无需单独放到此字段 ） |
| consignee_taxno | string | Option | 收件人税号（VAT税号） |
| IOSS | string | Option | 欧盟税号（iOSS税号） |

Shipper参数

| 参数名 | 数据类型 | 是否必填 | 说明 |
|---------------------|--------|---------|----------|
| shipper_company | string | Option | 发件人公司名 |
| shipper_countrycode | string | Require | 发件人国家二字码 |
| shipper_province | string | Require | 发件人省 |
| shipper_city | string | Require | 发件人城市 |
| shipper_street | string | Require | 发件人地址 |
| | | | |

| 参数名 | 数据类型 | 是否必填 | 发件人邮编 说明 |
|-------------------|--------|---------|-------------|
| shipper_postcode | string | Require | 发件人邮编 |
| shipper_areacode | string | Option | 区域代码 |
| shipper_name | string | Require | 发件人姓名 |
| shipper_telephone | string | Require | 发件人电话 |
| shipper_mobile | string | Require | 发件人手机 |
| shipper_email | string | Option | 发件人邮箱 |
| shipper_fax | string | Option | 发件人传真 |
| order_note | string | Option | 订单备注 |

| | | | |
|---------------|--------|--------|-----------------|
| shipper_taxno | string | Option | 发件人税号（发件人VAT税号） |
|---------------|--------|--------|-----------------|

ItemArr参数

| 参数名 | 数据类型 | 是否必填 | 说明 |
|----------------|--------|---------|----------|
| invoice_enname | string | Require | 英文海关申报品名 |

| | | | |
|----------------------|--------|---------|--|
| invoice_cnname | string | Option | 中文海关申报品名 |
| invoice_weight | float | Require | 申报重量，单位KG，精确到三位小数。 |
| invoice_quantity | int | Require | 数量 |
| unit_code | string | Option | 单位(MTR-米；PCE-件；SET-套)，默认PCE |
| invoice_unitcharge | float | Require | 单价 |
| invoice_currencycode | string | Option | 申报币种，不传值默认为USD(美元)；USD-美元,AUD-澳元,CAD-加元,EUR-欧元,GBP-英镑,HKD-港币,MXN-墨西哥元,RMB-人民币,RUB-俄罗斯卢布,CNY-新加坡元 |

| 参数名 | 数据类型 | 是否必填 | 说明 |
|------------------|--------|--------|--------------------------------|
| hs_code | string | Option | 俄罗斯卢布,SGD-新加坡元 海关协制编号(海关编码) |
| invoice_note | string | Option | 配货信息 |
| invoice_url | string | Option | 产品销售地址（销售链接） |
| sku | string | Option | 产品SKU编码 |
| material | string | Option | 申报材质 |
| invoice_function | string | Option | 用途 |

response XML示例:

成功返回示例:

```
<?xml version="1.0" encoding="UTF-8"?>
<SOAP-ENV:Envelope xmlns:SOAP-ENV="http://schemas.xmlsoap.org/soap/envelope/" xmlns:ns1="http://www.example.org/Ec/">
  <SOAP-ENV:Body>
    <ns1:callServiceResponse>
      <response>{"ask":"Success","message":"Success","reference_no":"WWTEST202001084549","shipping_method_no":"LW423745051CN","order_code":"HHWEW0008000011YQ","track_status":"1","sender_info_status":"1","ODA":"","agent_number":"496409","time_cost(s)":"3.8042180538177"}</response>
    </ns1:callServiceResponse>
  </SOAP-ENV:Body>
</SOAP-ENV:Envelope>
```

失败返回示例:

```
<?xml version="1.0" encoding="UTF-8"?>
<SOAP-ENV:Envelope xmlns:SOAP-ENV="http://schemas.xmlsoap.org/soap/envelope/" xmlns:ns1="http://www.example.org/Ec/">
  <SOAP-ENV:Body>
    <ns1:callServiceResponse>
      <response>{"ask":"Failure","message":"服务异常：订单数据不合法","reference_no":"WWTEST202001084545","Error":{"errMsg":"参考单号已存在[WWTEST202001084545]","errCode":"ORDER_REFERER_ISEXISTS"},"time_cost(s)":"0.92805314064026"}</response>
    </ns1:callServiceResponse>
  </SOAP-ENV:Body>
</SOAP-ENV:Envelope>
```

response参数:

| 参数名 | 数据类型 | 说明 |
|--------------------|--------|---|
| ask | string | 参考公共请求参数中response参数 |
| message | string | 参考公共请求参数中response参数 |
| reference_no | string | 客户单号 |
| shipping_method_no | string | 服务商单号(追踪单号\尾程派送单号)，如：RV507879168CN ,默认取此单号 |
| order_code | string | 华翰系统订单号，系统生成的唯一单号，如：HHWCO0296000051YQ，如果需要华翰运单号，可以获取这个字段，此单号也可以17TRACK或华翰官网（hh-exp.com）查询全程轨迹 |
| track_status | string | track_status（1-已产生跟踪号，2-等待后续更新跟踪号,3-不需要跟踪号）——暂未启用此功能 |
| sender_info_status | string | 是否需要分配发件人地址（0-是，1-否） |
| ODA | string | 是否需要ODA检验（Y-是） |
| agent_number | string | 渠道换单号 |
| Error | Object | 参考公共请求参数中Error格式 (注意： 获取报错信息是 message +errMessage 才是完整的报错提示) |

batchCreateOrder (批量创建订单)

简要描述：

批量创建订单接口

service名称:

batchCreateOrder

paramsJson示例：

```
[{
  "reference_no": "WWTEST202001084545",
  "shipping_method": "PK0032",
  "country_code": "US",
  "order_weight": 1,
  "order_pieces": "1",
  "length": 1,
  "width": 1,
  "height": 1,
  "Consignee": {
    "consignee_street": "19 N Long Ave",
    "consignee_street2": "",
    "consignee_name": "Xiao Cai",
    "consignee_telephone": "958465448",
    "consignee_postcode": "60644-3224",
    "consignee_province": "Illinois",
    "consignee_city": "Chicago",
    "consignee_taxno": "TA2020181245"
  },
  "Shipper": {
    "shipper_countrycode": "CN",
    "shipper_province": "GUANGDONG",
    "shipper_city": "SHENZHEN",
    "shipper_street": "pinghu 55 SHENZHEN GUANGDONG",
    "shipper_postcode": "518000",
    "shipper_name": "hh cai",
    "shipper_telephone": "18011911234",
    "shipper_mobile": "18011911234"
  }
},
```



```

    "ItemArr": [{
      "invoice_cnname": "手机壳1",
      "invoice_enname": "Mobile phone shell1",
      "invoice_weight": 1,
      "invoice_quantity": "1",
      "invoice_unitcharge": 3.3,
      "sku": "4644392"
    }, {
      "invoice_cnname": "手机壳2",
      "invoice_enname": "Mobile phone shell2",
      "invoice_weight": 1,
      "invoice_quantity": "1",
      "invoice_unitcharge": 3.3,
      "sku": "4644392"
    }
  ], {
    "shipper_hawbcode": "",
    "reference_no": "WWTEST202001084546",
    "shipping_method": "PK0032",
    "country_code": "US",
    "order_weight": 1,
    "order_pieces": "1",
    "length": 1,
    "width": 1,
    "height": 1,
    "Consignee": {
      "consignee_street": "19 N Long Ave",
      "consignee_street2": "",
      "consignee_name": "Xiao Cai",
      "consignee_telephone": "958465448",
      "consignee_postcode": "60644-3224",
      "consignee_province": "Illinois",
      "consignee_city": "Chicago",
      "consignee_taxno": "TA2020181246"
    },
    "Shipper": {
      "shipper_countrycode": "CN",
      "shipper_province": "GUANGDONG",
      "shipper_city": "SHENZHEN",
      "shipper_street": "pinghu 55 SHENZHEN GUANGDONG",
      "shipper_postcode": "518000",
      "shipper_name": "hh cai",
      "shipper_telephone": "18011911234",
      "shipper_mobile": "18011911234"
    },
    "ItemArr": [{

```

```
"invoice_cnname": "手机壳1",
"invoice_enname": "Mobile phone shell1",
"invoice_weight": 1,
"invoice_quantity": "1",
"invoice_unitcharge": 3.33,
"sku": "4644392"
},{
  "invoice_cnname": "手机壳2",
  "invoice_enname": "Mobile phone shell2",
  "invoice_weight": 1,
  "invoice_quantity": "1",
  "invoice_unitcharge": 3.33,
  "sku": "4644392"
}]
}]
```

paramsJson参数:

paramsJson参数参考createOrder

response XML示例:

成功返回示例:

```
<?xml version="1.0" encoding="UTF-8"?>
<SOAP-ENV:Envelope xmlns:SOAP-ENV="http://schemas.xmlsoap.org/soap/envelope/" xmlns:ns1="http://www.example.org/Ec/">
  <SOAP-ENV:Body>
    <ns1:callServiceResponse>
      <response>
        {
          "ask": "Success",
          "message": "Success",
          "Result": [
            {
              "ask": "Success",
              "message": "Success",
              "reference_no": "WWTEST202001084999",
              "shipping_method_no": "LW423680523CN",
              "order_code": "HHWEW0008000004YQ",
              "track_status": "1",
              "sender_info_status": "1",
              "ODA": "",
              "agent_number": "496494"
            }
          ]
        }
      
```

```

    },
    {
      "ask": "Success",
      "message": "Success",
      "reference_no": "WWTEST202001084998",
      "shipping_method_no": "LW423680660CN",
      "order_code": "HHWEW0008000005YQ",
      "track_status": "1",
      "sender_info_status": "1",
      "ODA": "",
      "agent_number": "496514"
    }
  ],
  "Error": [],
  "time_cost(s)": "6.6593809127808"
}
</response>
</ns1:callServiceResponse>
</SOAP-ENV:Body>
</SOAP-ENV:Envelope>

```

失败返回示例:

```

<?xml version="1.0" encoding="UTF-8"?>
<SOAP-ENV:Envelope xmlns:SOAP-ENV="http://schemas.xmlsoap.org/soap/envelope/" xmlns:ns1="http://www.example.org/Ec/">
  <SOAP-ENV:Body>
    <ns1:callServiceResponse>
      <response>
        {
          "ask": "Success",
          "message": "Success",
          "Result": [
            {
              "ask": "Failure",
              "message": "服务异常：订单数据不合法",
              "reference_no": "WWTEST202001084999",
              "Error": {
                "errMessage": "参考单号已存在[WWTEST202001084999]",
                "errCode": "ORDER_REFER_ISEXISTS"
              }
            }
          ],
          {
            "ask": "Failure",
            "message": "服务异常：HHWEW0008000009YQ换号失

```

```
败。下家接口报错：异常:B03 收件人邮编不能为空";
    "reference_no": "WWTEST202001084997"
  }
],
  "Error": [],
  "time_cost(s)": "3.1871819496155"
}
</response>
</ns1:callServiceResponse>
</SOAP-ENV:Body>
</SOAP-ENV:Envelope>
```

response参数:

| 参数名 | 数据类型 | 说明 |
|---------|--------|-----------------------------|
| ask | string | 参考公共请求参数中response参数 |
| message | string | 参考公共请求参数中response参数 |
| Result | string | 参考 createOrder 的 response参数 |
| Error | Object | 参考公共请求参数中Error格式 |

getCargoTrack (轨迹查询)

简要描述：

轨迹查询接口

service名称:

getCargoTrack

paramsJson示例：

```
{
  "codes": [ "HHWDE9344000011YQ", "HHWDE9344000012YQ" ]
}
```

paramsJson参数:

| 参数名 | 数据类型 | 是否必填 | 说明 |
|-------|--------------|---------|--|
| codes | Object/Array | Require | 服务商单号shipping_method_no（或者系统订单号c 数组,如{"codes":["TFL1"," TFL2"]} |

注： 1、此单号为创建订单时候我司返回的追踪号（shipping_method_no 字段）

* 2、此接口支持批量查询，建议一次请求50票；不建议并发请求，并发可能会被防火墙拦截 *

response XML示例:

成功返回示例:

```
<?xml version="1.0" encoding="UTF-8"?>
<SOAP-ENV:Envelope xmlns:SOAP-ENV="http://schemas.xmlsoap.org/soap/envelope/" xmlns:ns1="http://www.example.org/Ec/">
  <SOAP-ENV:Body>
```

```

<ns1:callServiceResponse>
  <response>{"ask":"Success","message":"Success","Data":[{"Code":"HHWDE9344000011YQ","Country_code":"FR","New_date":"2019-12-31 09:26:30","New_Comment":"快件操作完成","Status":"DF","Detail":[{"Occur_date":"2019-12-31 09:26:30","Status":"DF","Comment":"快件操作完成 Shipment departed from facility","track_area":"SHENZHEN"}, {"Occur_date":"2019-12-31 09:26:30","Status":"AF","Comment":"快件到达作业中心 Shipment arrived at facility","track_area":"SHENZHEN"}, {"Occur_date":"2019-12-10 17:33:00","Status":"IR","Comment":"快件电子信息已经收到 Shipment information received","track_area":""}]}], {"Code":"HHWDE9344000012YQ","Country_code":"FI","New_date":"2019-12-10 17:33:03","New_Comment":"运单电子信息已收到","Status":"NO","Detail":[{"Occur_date":"2019-12-10 17:33:03","Status":"IR","Comment":"快件电子信息已经收到 Shipment information received","track_area":""}]}], "Error":[], "time_cost(s)":"0.22901296615601"}</response>
</ns1:callServiceResponse>
</SOAP-ENV:Body>
</SOAP-ENV:Envelope>

```

失败返回示例:

```

<?xml version="1.0" encoding="UTF-8"?>
<SOAP-ENV:Envelope xmlns:SOAP-ENV="http://schemas.xmlsoap.org/soap/envelope/" xmlns:ns1="http://www.example.org/Ec/">
  <SOAP-ENV:Body>
    <ns1:callServiceResponse>
      <response>{"ask":"Success","message":"Success","Data":[{"Code":"HHWDE9344000011KYQ","Country_code":"","New_date":"","New_Comment":"","Status":"","Detail":[]}, {"Code":"HHWDE9344000012kkYKQ","Country_code":"","New_date":"","New_Comment":"","Status":"","Detail":[]}], "Error":[], "time_cost(s)":"0.18701100349426"}</response>
    </ns1:callServiceResponse>
  </SOAP-ENV:Body>
</SOAP-ENV:Envelope>

```

```

<?xml version="1.0" encoding="UTF-8"?>
<SOAP-ENV:Envelope xmlns:SOAP-ENV="http://schemas.xmlsoap.org/soap/envelope/" xmlns:ns1="http://www.example.org/Ec/">
  <SOAP-ENV:Body>
    <ns1:callServiceResponse>
      <response>{"ask":"Failure","message":"","Data":[], "Error":{"cnMessage":"单号不能为空","enMessage":"Order Code. can not be empty"},"time_cost(s)":"0.063003063201904"}</response>
    </ns1:callServiceResponse>
  </SOAP-ENV:Body>
</SOAP-ENV:Envelope>

```



response参数:

| 参数名 | 数据类型 | 说明 |
|---------|--------|---------------------|
| ask | string | 参考公共请求参数中response参数 |
| message | string | 参考公共请求参数中response参数 |
| Data | Object | 数据内容(2维数组) |
| Error | Object | 参考公共请求参数中Error格式 |

Data参数:

| 参数名 | 数据类型 | 说明 |
|--------------|--------|---------------------------------|
| Code | string | 单号 |
| Country_code | string | 目的国家代码 |
| New_date | string | 最新的轨迹时间，格式为：YYYY-MM-DD HH:MM:SS |
| New_Comment | string | 最新的轨迹内容 |
| Status | string | 轨迹状态码 |
| Detail | Object | 轨迹明细内容(2维数组) |

Detail参数:

| 参数名 | 数据类型 | 说明 |
|------------|--------|--------|
| Occur_date | string | 轨迹发生时间 |
| Status | string | 轨迹状态 |
| Comment | string | 轨迹内容 |
| track_area | string | 发生地点全称 |

轨迹状态代码对应表:

| 轨迹状态码 | 节点中文描述 | 节点英文描述 |
|-------|---------|--------------------------------------|
| IR | 电子信息已收到 | Shipment information received |
| AF | 已入仓 | Has entered the warehouse |
| DF | 已出仓 | Out warehouse |
| IA | 已上网 | Internet Access |
| WB | 到达中转站 | Arrived at Transit Facility |
| WD | 离开中转站 | Departed from Transit Facility |
| GG | 已过港 | Have a port |
| EG | 已报关 | Have out customs clearance |
| AP | 已交航 | Air Transport |
| QF | 已起飞 | Has been take off |
| LD | 已落地 | Have fall to the ground |
| QG | 清关中 | Customs clearance in progress |
| YG | 已清关 | Have customs clearance |
| YQ | 已提取 | Already extracted |
| DR | 到达目的地 | Destination Reached |
| CA | 到达尾程承运商 | arrived at last mile sorting center |
| CB | 离开尾程承运商 | Leaving the terminal transfer center |
| ND | 运输中 | Normal delivery |
| CC | 派送妥投 | Delivered |
| UE | 退件 | Untread Expressage |
| PB | 到达待取 | Arrival to be picked up |
| AC | 清关异常 | Abnormal customs clearance |
| FI | 签收失败 | Delivery failed |

modifyOrderWeight （修改订单重量）

简要描述：

修改订单重量接口

service名称:

modifyOrderWeight

paramsJson示例：

```
[{
  "order_code": "HHWEW0007000006YQ",
  "weight": "0.02"
},{
  "order_code": "HHWEW0007000005YQ",
  "weight": "0.03"
}]
```

paramsJson参数:

| 参数名 | 数据类型 | 是否必填 | 说明 |
|------------|--------|---------|--------------------------|
| order_code | string | Require | 客户单号（或者系统订单号，或者服务商单号都可以） |
| weight | string | Require | 重量，单位KG,最多支持3位小数。 |

response XML示例:

成功返回示例:

```
<?xml version="1.0" encoding="UTF-8"?>
<SOAP-ENV:Envelope xmlns:SOAP-ENV="http://schemas.xmlsoap.org/soap/envelope/" xmlns:ns1="http://www.example.org/Ec/">
  <SOAP-ENV:Body>
    <ns1:callServiceResponse>
```

```
<response>{"ask": "Success", "message": "", "Result": [{"order_code": "HHWEW0007000004YQ", "ask": "Success", "message": "Success"}, {"order_code": "HHWEW0007000005YQ", "ask": "Success", "message": "Success"}], "time_cost(s)": "0.29701685905457"}</response>
</ns1:callServiceResponse>
</SOAP-ENV:Body>
</SOAP-ENV:Envelope>
```

失败返回示例:

```
<?xml version="1.0" encoding="UTF-8"?>
<SOAP-ENV:Envelope xmlns:SOAP-ENV="http://schemas.xmlsoap.org/soap/envelope/" xmlns:ns1="http://www.example.org/Ec/">
  <SOAP-ENV:Body>
    <ns1:callServiceResponse>
      <response>{"ask": "Success", "message": "", "Result": [{"order_code": "HHWEW0007000006YQ", "ask": "Failure", "Error": {"errMsg": "只支持“草稿”，“换号中”，“已预报”等状态更新重量!", "errCode": ""}}, {"order_code": "HHWEW000700000KYQ", "ask": "Failure", "Error": {"errMsg": "单号不存在!", "errCode": ""}}], "time_cost(s)": "0.25001502037048"}</response>
    </ns1:callServiceResponse>
  </SOAP-ENV:Body>
</SOAP-ENV:Envelope>
```

response参数:

| 参数名 | 数据类型 | 说明 |
|---------|--------|---------------------|
| ask | string | 参考公共请求参数中response参数 |
| message | string | 参考公共请求参数中response参数 |
| Result | string | 结果数组 |
| Error | Object | 参考公共请求参数中Error格式 |

Result参数:

| 参数名 | 数据类型 | 说明 |
|-----|--------|---------------------|
| ask | string | 参考公共请求参数中response参数 |

modifyOrderWeight (修改订单重量)

| 参数名 | 数据类型 | 说明 |
|------------|--------|---------------------|
| message | string | 参考公共请求参数中response参数 |
| order_code | string | 请求单号 |
| Error | Object | 参考公共请求参数中Error格式 |

getTrackNumber (查询跟踪号)

简要描述：

查询运单入库后实际发货跟踪号接口

service名称:

getTrackNumber

paramsJson示例：

```
{
  "reference_no": [ "HHWEW0007000008YQ", "HHWEW0007000009YQ" ]
}
```

paramsJson参数:

| 参数名 | 数据类型 | 是否必填 | 说明 |
|--------------|--------|---------|---|
| reference_no | Object | Require | 客户单号reference_no（或者系统运单号order_co 数组,如{" reference_no ":["code1"," code2"]} |

response XML示例:

成功返回示例:

```
<?xml version="1.0" encoding="UTF-8"?>
<SOAP-ENV:Envelope xmlns:SOAP-ENV="http://schemas.xmlsoap.org/soap/envelope/" xmlns:ns1="http://www.example.org/Ec/">
  <SOAP-ENV:Body>
    <ns1:callServiceResponse>
      <response>{"ask": "Success", "data": [{"state": "1", "OrderNumber": "WWW3THHF5S25A23", "TrackingNumber": "L0715818719CN", "WayBillNumber": "HHWEW0007000008YQ"}, {"state": "1", "OrderNumber": "WWW3THHF5S25A23", "TrackingNumber": "L0715818719CN", "WayBillNumber": "HHWEW0007000008YQ"}], "Error": [], "message": "全部获取成功", "time_cost(s)": "0.35601997375488"}</response>
```

```
</ns1:callServiceResponse>
</SOAP-ENV:Body>
</SOAP-ENV:Envelope>
```

失败返回示例:

```
<?xml version="1.0" encoding="UTF-8"?>
<SOAP-ENV:Envelope xmlns:SOAP-ENV="http://schemas.xmlsoap.org/soap/envelope/" xmlns:ns1="http://www.example.org/Ec/">
  <SOAP-ENV:Body>
    <ns1:callServiceResponse>
      <response>{"ask":"Failure","data":[{"state":"0","OrderNumber":"HHWEW0007000008YQK","TrackingNumber":"","WayBillNumber":"","msg":"单号:[HHWEW0007000008YQK]订单信息不存在"}, {"state":"0","OrderNumber":"HHWEW0007000008YQL","TrackingNumber":"","WayBillNumber":"","msg":"单号:[HHWEW0007000008YQL]订单信息不存在"}],"Error":[],"message":"全部获取失败","time_cost(s)":"0.24401378631592"}</response>
    </ns1:callServiceResponse>
  </SOAP-ENV:Body>
</SOAP-ENV:Envelope>
```

response参数:

| 参数名 | 数据类型 | 说明 |
|---------|--------|---------------------|
| ask | string | 参考公共请求参数中response参数 |
| message | string | 参考公共请求参数中response参数 |
| data | Object | 数据内容(2维数组) |
| Error | Object | 参考公共请求参数中Error格式 |

data参数:

| 参数名 | 数据类型 | 说明 |
|----------------|--------|------------|
| state | int | 1为成功; 0为失败 |
| OrderNumber | string | 客户单号 |
| TrackingNumber | string | 跟踪号 |

getTrackNumber (查询跟踪号)

| 参数名 | 数据类型 | 说明 |
|---------------|--------|-------|
| WayBillNumber | string | 系统运单号 |
| msg | string | 错误信息 |

getShippingMethod （获取配送方式）

简要描述：

获取配送方式接口

service名称:

getShippingMethod

paramsJson示例：

paramsJson不需要传参

response XML示例:

成功返回示例:

```
<?xml version="1.0" encoding="UTF-8"?>
<SOAP-ENV:Envelope xmlns:SOAP-ENV="http://schemas.xmlsoap.org/soap/envelope/" xmlns:ns1="http://www.example.org/Ec/">
  <SOAP-ENV:Body>
    <ns1:callServiceResponse>
      <response>{"ask":"Success","data":[{"code":"PK0032","cn_name":"B测试产品","en_name":"B测试产品","group_code":"SP","track_status":"N","aging":"1-3","note":""},{ "code":"PK0048","cn_name":"C测试产品","en_name":"Cproduct","group_code":"SP","track_status":"N","aging":"1-2","note":""},{ "code":"PK0059","cn_name":"D测试产品","en_name":"Dproduct","group_code":"MA","track_status":"N","aging":"","note":""},{ "code":"FEDEX-IE","cn_name":"FEDEX-IE","en_name":"FEDEX-IE","group_code":"FE","track_status":"Y","aging":"1-7","note":"FEDEX-IE"},{ "code":"FEDEX-IP","cn_name":"FEDEX-IP","en_name":"FEDEX-IP","group_code":"FE","track_status":"Y","aging":"1-7","note":""},{ "code":"HKUPSDLCX","cn_name":"HK-UPS代理促销","en_name":"HKUPSDLCX","group_code":"UP","track_status":"N","aging":"","note":""},{ "code":"HKUPSTH5","cn_name":"HK-UPS特惠5000","en_name":"HKUPSTH5","group_code":"UP","track_status":"Y","aging":"","note":""},{ "code":"HKUPSTH","cn_name":"HK-UPS特惠6000","en_name":"HKUPSTH6000","group_code":"UP","track_status":"Y","aging":"","note":""},{ "code":"HKUPSTHCX","cn_name":"HK-UPS特惠促销","en_name":"HKUPSTHCX","group_code":"UP","track_status":"Y","aging":"","note":""},{ "code":"HKUPSLDF","cn_name":"HK-UPS蓝单F","en_name":"HKUPSLDF","group_code":"UP","track_status":"Y","aging":"","note":""},{ "code":"HKUPSLDCX","c
```

```

n_name":"HK-UPS蓝单促销","en_name":"HKUPSLDCX","group_code":"UP","track_status":"Y","aging":"","note":""},{
"code":"HKUPSKS","cn_name":"HK-UPS速快","en_name":"HKUPSKS","group_code":"SP","track_status":"Y","aging":"","note":""},
{"code":"HKDHLDLJ","cn_name":"HKDHL-代理价","en_name":"HKDHLDLJ","group_code":"DH","track_status":"Y","aging":"1-7","note":""},
{"code":"HLDHLMGJ","cn_name":"HKDHL-敏感价","en_name":"HKDHLMGJ","group_code":"DH","track_status":"Y","aging":"1-7","note":""},
{"code":"HKUPSDLJ","cn_name":"HKUPS-代理价","en_name":"HKUPSDLJ","group_code":"UP","track_status":"Y","aging":"1-7","note":""},
{"code":"HKUPSTH5F","cn_name":"HKUPS特惠5000-F","en_name":"HKUPSTH5F","group_code":"UP","track_status":"Y","aging":"","note":""},
{"code":"PK0028","cn_name":"UPS红单包税","en_name":"UPSHDBSCP","group_code":"SP","track_status":"N","aging":"","note":""},
{"code":"PK0019","cn_name":"US--速快(平衡车类)","en_name":"USSKPHCCP","group_code":"SP","track_status":"N","aging":"","note":""},
{"code":"PK0018","cn_name":"US--速快(敏感)","en_name":"USSKMGCP","group_code":"SP","track_status":"N","aging":"","note":""},
{"code":"PK0014","cn_name":"US--速快(纯电)","en_name":"USSKCDCP","group_code":"SP","track_status":"Y","aging":"","note":""},
{"code":"PK0015","cn_name":"US--速快(美国东部)","en_name":"USSKMGBSCP","group_code":"SP","track_status":"Y","aging":"","note":""},
{"code":"PK0017","cn_name":"US--速快(美国中部)","en_name":"USSKMGZBCP","group_code":"SP","track_status":"N","aging":"","note":""},
{"code":"PK0016","cn_name":"US--速快(美国西部)","en_name":"USSKMGXBCP","group_code":"SP","track_status":"Y","aging":"","note":""},
{"code":"EST","cn_name":"俄速通","en_name":"EST","group_code":"MA","track_status":"Y","aging":"1-30","note":""},
{"code":"NJGH","cn_name":"南京挂号","en_name":"NJGH","group_code":"MA","track_status":"Y","aging":"1-30","note":""},
{"code":"XMPYCP","cn_name":"厦门平邮","en_name":"XMPYCP","group_code":"PY","track_status":"N","aging":"1-30","note":""},
{"code":"PK0053","cn_name":"小包测试","en_name":"小包测试","group_code":"SP","track_status":"Y","aging":"1-3","note":""},
{"code":"DHLXB","cn_name":"德国DHL专线","en_name":"DGDHLZX","group_code":"SP","track_status":"Y","aging":"1-15","note":""},
{"code":"PK0095","cn_name":"德国专线","en_name":"DGZXC","group_code":"SP","track_status":"Y","aging":"3-7","note":""},
{"code":"PK0013","cn_name":"日本FBA专线(平衡车类)","en_name":"RBFBAZXPCLCP","group_code":"SP","track_status":"N","aging":"","note":"RBFBAZXPCLCP"},
{"code":"PK0011","cn_name":"日本FBA专线(深圳直航普货)","en_name":"RBFBAZXSZZHPHCP","group_code":"SP","track_status":"N","aging":"","note":""},
{"code":"PK0012","cn_name":"日本FBA专线(深圳直航经济)","en_name":"RBFBAZXSZZHJJ","group_code":"SP","track_status":"N","aging":"","note":""},
{"code":"PK0010","cn_name":"日本FBA专线(香港直航)","en_name":"RBFBAZXGZH","group_code":"SP","track_status":"N","aging":"","note":""},
{"code":"PK0047","cn_name":"欧洲FBA空运(单)","en_name":"OZFAKYD","group_code":"SP","track_status":"N","aging":"","note":"欧洲FBA空运(单)"},
{"code":"PK0051","cn_name":"欧洲FBA空运(卡板)","en_name":"OZFAKYKB","group_code":"SP","track_status":"N","aging":"","note":""},
{"code":"PK0044","cn_name":"欧洲FBA空运(大)","en_name":"OZFAKYDCP","group_code":"SP","track_status":"Y","aging":"1-10","note":""},
{"code":"PK0057","cn_name":"泰邮平邮测试","en_name":"TYPYCSC","group_code":"SP",

```



```

"track_status":"N","aging":"","note":""},{ "code":"PK0050","cn_name":"测试A
PI换号","en_name":"API测试","group_code":"PY","track_status":"N","aging":
":"","note":""},{ "code":"PK0058","cn_name":"测试hh","en_name":"testhh","grou
p_code":"PY","track_status":"N","aging":"","note":""},{ "code":"PK0049","c
n_name":"测试强制换号","en_name":"强制换号","group_code":"SP","track_statu
s":"N","aging":"","note":""},{ "code":"PK0007","cn_name":"测试海运(方)","en
_name":"测试海运(方)","group_code":"MA","track_status":"Y","aging":" 3- 3
0","note":""},{ "code":"HYOZFBA","cn_name":"海运-欧洲FBA","en_name":"HYOZFB
A","group_code":"SP","track_status":"Y","aging":"","note":""},{ "code":"PK
0052","cn_name":"海运DEMO","en_name":"HHHYDEMO","group_code":"SP","track_s
tatus":"Y","aging":"2-3","note":""},{ "code":"SZDHLAJ","cn_name":"深圳DHL-A
价","en_name":"SZDHLAJ","group_code":"DH","track_status":"Y","aging":"","
note":""},{ "code":"SZDHLXHJ","cn_name":"深圳DHL小货价","en_name":"SZDHLXH
J","group_code":"DH","track_status":"Y","aging":"1-7","note":""},{ "code":
"SZEMS","cn_name":"深圳EMS","en_name":"SZEMS","group_code":"EM","track_sta
tus":"Y","aging":"1-7","note":""},{ "code":"EUB-SZ","cn_name":"深圳eub","en
_name":"SZEUB","group_code":"EM","track_status":"Y","aging":"1-15","note"
:""},{ "code":"SZPYCP","cn_name":"深圳平邮","en_name":"SZPYCP","group_code"
:"PY","track_status":"Y","aging":"3-30","note":""},{ "code":"PK0041","cn_n
ame":"深圳平邮(俄罗斯)","en_name":"SZPYRUCP","group_code":"PY","track_stat
us":"N","aging":"1-30","note":""},{ "code":"PK0043","cn_name":"深圳平邮-带
电","en_name":"SZPYDDCP","group_code":"PY","track_status":"N","aging":"1-
30","note":""},{ "code":"PK0001","cn_name":"深圳挂号","en_name":"SZGH","gro
up_code":"MA","track_status":"Y","aging":"1-30","note":""},{ "code":"PK004
0","cn_name":"深圳挂号(俄罗斯)","en_name":"SZGHRUCP","group_code":"MA","tr
ack_status":"Y","aging":"1-30","note":"只到俄罗斯"},{ "code":"PK0042","cn_n
ame":"深圳挂号-带电","en_name":"SZGHDDCP","group_code":"MA","track_status"
:"Y","aging":"1-30","note":""},{ "code":"XSXMPYCP","cn_name":"线上-厦门平
邮","en_name":"XSXMPYCP","group_code":"PY","track_status":"Y","aging":"1-
30","note":""},{ "code":"XSZZPY","cn_name":"线上-郑州平邮","en_name":"XSZZP
Y","group_code":"MA","track_status":"Y","aging":"1-15","note":""},{ "code"
:"XSZZGH","cn_name":"线上-郑州挂号","en_name":"XSZZGH","group_code":"MA",
"track_status":"Y","aging":"1-15","note":""},{ "code":"PK0029","cn_name":
"美国FBA海运散货","en_name":"MGFBAHYSHCPC","group_code":"SP","track_statu
s":"N","aging":"","note":""},{ "code":"PK0023","cn_name":"美国UPS专线(东
部)","en_name":"MGUPSZXDBCP","group_code":"SP","track_status":"N","aging"
:"","note":""},{ "code":"PK0025","cn_name":"美国UPS专线(中部)","en_name":"M
GUPSZXZBCP","group_code":"SP","track_status":"N","aging":"","note":""},{
"code":"PK0024","cn_name":"美国UPS专线(西部)","en_name":"MGUPSZXBCP","gro
up_code":"SP","track_status":"N","aging":"","note":""},{ "code":"HEB","cn_
name":"翰俄宝","en_name":"HEB","group_code":"MA","track_status":"Y","agin
g":"1-30","note":""},{ "code":"PK0056","cn_name":"航空小包测试","en_name":
"HHXBCS","group_code":"PY","track_status":"N","aging":"","note":""},{ "cod
e":"PK0030","cn_name":"英国FBA海运散货(不含税)","en_name":"YGFBAHYSHCP","g
roup_code":"SP","track_status":"N","aging":"","note":""},{ "code":"YGZXCP"
,"cn_name":"英国专线","en_name":"YGZXCP","group_code":"SP","track_status":

```

```
"Y","aging":"1-7","note":""},{ "code":"HLPY","cn_name":"荷兰平邮","en_name":"HLPY","group_code":"PY","track_status":"Y","aging":"1-30","note":""},{ "code":"HLGH","cn_name":"荷兰挂号","en_name":"HLGH","group_code":"MA","track_status":"Y","aging":"1-20","note":""},{ "code":"ZZPY","cn_name":"郑州平邮","en_name":"ZZPY","group_code":"PY","track_status":"N","aging":"1-30","note":""},{ "code":"ZZGH","cn_name":"郑州挂号","en_name":"ZZGH","group_code":"MA","track_status":"Y","aging":"1-30","note":""}], "time_cost(s)": "1.5290870666504"}</response>
</ns1:callServiceResponse>
</SOAP-ENV:Body>
</SOAP-ENV:Envelope>
```

response参数:

| 参数名 | 数据类型 | 说明 |
|---------|--------|---------------------|
| ask | string | 参考公共请求参数中response参数 |
| message | string | 参考公共请求参数中response参数 |
| data | Object | 数据内容(2维数组) |
| Error | Object | 参考公共请求参数中Error格式 |

data参数:

| 参数名 | 数据类型 | 说明 |
|--------------|--------|---------------------------|
| code | string | 运输方式代码 |
| cn_name | string | 中文名称 |
| en_name | string | 英文名称 |
| group_code | string | 产品组 |
| track_status | string | 是否可跟踪(TRACK)，N为不可跟踪、Y为可跟踪 |
| aging | string | 派送时效 |
| note | string | 备注 |

getLabelUrl (获取标签)

简要描述：

获取标签接口

service名称:

getLabelUrl

paramsJson示例：

```
{
  "reference_no": "HHWEW0006000012YQ",
  "label_type": 1,
  "label_content_type": 4
}
```

paramsJson参数:

| 参数名 | 数据类型 | 是否必填 | 说明 |
|--------------------|--------|---------|---|
| reference_no | string | Require | 客户单号reference_no（或者系统运单号order_code，或服务商单号shipping_method_no都可以） |
| label_type | int | Require | PDF标签尺寸类型（1：10 * 10标签；2：A4纸；3：10 * 15标签） |
| label_content_type | int | option | 1-标签；2-报关单；3-配货单；4-标签+报关单；5-标签+配货单；6-标签+报关单+配货单，默认为4 |

response XML示例:

成功返回示例:

```
<?xml version="1.0" encoding="UTF-8"?>
<SOAP-ENV:Envelope xmlns:SOAP-ENV="http://schemas.xmlsoap.org/soap/envelope/" xmlns:ns1="http://www.example.org/Ec/">
  <SOAP-ENV:Body>
    <ns1:callServiceResponse>
      <response>{"ask":"Success","message":"获取标签成功","Error":[],"type":"pdf","url":"http://127.0.0.1/index/get-label/code/HHWEW0006000012YQ","time_cost(s)":"0.88304996490479"}</response>
    </ns1:callServiceResponse>
  </SOAP-ENV:Body>
</SOAP-ENV:Envelope>
```

失败返回示例:

```
<?xml version="1.0" encoding="UTF-8"?>
<SOAP-ENV:Envelope xmlns:SOAP-ENV="http://schemas.xmlsoap.org/soap/envelope/" xmlns:ns1="http://www.example.org/Ec/">
  <SOAP-ENV:Body>
    <ns1:callServiceResponse>
      <response>{"ask":"Failure","message":"","Error":{"errCode":"","errMessage":"HHWEW0006000012KYQ订单不存在"},"type":"pdf","url":"","time_cost(s)":"0.18701100349426"}</response>
    </ns1:callServiceResponse>
  </SOAP-ENV:Body>
</SOAP-ENV:Envelope>
```

response参数:

| 参数名 | 数据类型 | 说明 |
|---------|--------|---|
| ask | string | 参考公共请求参数中response参数 |
| message | string | 参考公共请求参数中response参数 |
| url | string | PDF标签格式URL地址。注标签URL有效时间为1个星期，如果未保存标签文件到本地，可以重新调用获取标签接口生成新的标签。 |
| type | string | 文件格式 |
| Error | Object | 参考公共请求参数中Error格式 |

batchGetLabelUrl (批量获取标签)

简要描述：

批量获取标签接口

注：暂时批量获取标签的接口只能打印同一物流产品的订单，不同物流产品混合打印会报错

service名称:

batchGetLabelUrl

paramsJson示例：

```
{
  "reference_nos":["HHWEW0191000054YQ","HHWEW0191000046YQ"],
  "label_type":1,
  "label_content_type":6,
  "extra_option":{
    "print_declare_info":"N"
  }
}
```

paramsJson参数:

| 参数名 | 数据类型 | 是否必填 | 说明 |
|---------------|--------|---------|--|
| reference_nos | object | Require | 客户参考号（或者系统运单号order_code 或服务商追踪号shipping_method_no ） 注意：一次性最多支持20票批量生成,超过数量容易出现获取失败或超时等错误 |
| label_type | int | Require | PDF标签尺寸类型：1：10 * 10 标签；2：A4纸；3：10 * 15标签 |
| | | | 1-标签；2-报关单；3-配货单；4-标签 |

| | | | |
|---------------------------|-------------|----------------|---|
| label_content_type 参数名 | int 数据类型 | Option 是否必填 | +报关单；5-标签+配货单；6-标签 说明 +报关单+配货单，默认为4 |
| extra_option | object | Option | 标签可选项 |

extra_option参数:

| | | | |
|--------------------|--------|--------|---------------------|
| 参数名 | 数据类型 | 是否必填 | 说明 |
| print_declare_info | string | Option | 是否打印配货信息：Y是，N否，默认为Y |

response XML示例:

成功返回示例:

```
<?xml version="1.0" encoding="UTF-8"?>
<SOAP-ENV:Envelope xmlns:SOAP-ENV="http://schemas.xmlsoap.org/soap/envelope/" xmlns:ns1="http://www.example.org/Ec/">
  <SOAP-ENV:Body>
    <ns1:callServiceResponse>
      <response>{"ask":"Success","message":"Success","url":"http://192.168.16.21:10001/PDF/aa74bb0c-d7db-4182-9831-d9ce1f39f828.pdf","time_cost(s)":"7.1494090557098"}</response>
    </ns1:callServiceResponse>
  </SOAP-ENV:Body>
</SOAP-ENV:Envelope>
```

失败返回示例:

```
<?xml version="1.0" encoding="UTF-8"?>
<SOAP-ENV:Envelope xmlns:SOAP-ENV="http://schemas.xmlsoap.org/soap/envelope/" xmlns:ns1="http://www.example.org/Ec/">
  <SOAP-ENV:Body>
    <ns1:callServiceResponse>
      <response>{"ask":"Failure","message":"","Error":{"errCode":"","errMessage":"HHWEW0191000054YYQ订单不存在"},"time_cost(s)":"0.29101586341858"}</response>
    </ns1:callServiceResponse>
  </SOAP-ENV:Body>
</SOAP-ENV:Envelope>
```

response参数:

| 参数名 | 数据类型 | 说明 |
|---------|--------|---------------------|
| ask | string | 参考公共请求参数中response参数 |
| message | string | 参考公共请求参数中response参数 |
| url | string | PDF标签格式URL地址 |
| Error | Object | 参考公共请求参数中Error格式 |

cancelOrder （取消订单）

简要描述：

取消订单接口

service名称:

cancelOrder

paramsJson示例：

```
{
  "reference_no": "HHWEW0007000006YQ"
}
```

paramsJson参数:

| 参数名 | 数据类型 | 是否必填 | 说明 |
|--------------|--------|---------|---------------------------------|
| reference_no | string | Require | 客户单号（或者系统运单号），注：只有草稿、已预报状态支持取消。 |

response XML示例:

成功返回示例:

```
<?xml version="1.0" encoding="UTF-8"?>
<SOAP-ENV:Envelope xmlns:SOAP-ENV="http://schemas.xmlsoap.org/soap/envelope/" xmlns:ns1="http://www.example.org/Ec/">
  <SOAP-ENV:Body>
    <ns1:callServiceResponse>
      <response>{"ask":"Success","message":"Success","reference_no":"HHWEW0007000005YQ","time_cost(s)":"0.45802593231201"}</response>
    </ns1:callServiceResponse>
  </SOAP-ENV:Body>
</SOAP-ENV:Envelope>
```


失败返回示例:

```
<?xml version="1.0" encoding="UTF-8"?>
<SOAP-ENV:Envelope xmlns:SOAP-ENV="http://schemas.xmlsoap.org/soap/envelope/" xmlns:ns1="http://www.example.org/Ec/">
  <SOAP-ENV:Body>
    <ns1:callServiceResponse>
      <response>{"ask":"Failure","message":"订单不存在","reference_no":"HHWEW00070000006KYQ","Error":{"errMsg":"订单不存在","errCode":"5000"},"time_cost(s)":"0.2200129032135"}</response>
    </ns1:callServiceResponse>
  </SOAP-ENV:Body>
</SOAP-ENV:Envelope>
```

response参数:

| 参数名 | 数据类型 | 说明 |
|--------------|--------|---------------------|
| ask | string | 参考公共请求参数中response参数 |
| message | string | 参考公共请求参数中response参数 |
| reference_no | string | 需要删除的客户单号（或者系统运单号） |
| Error | Object | 参考公共请求参数中Error格式 |

getOrder (查询订单)

简要描述：

查询订单接口

service名称:

getOrder

paramsJson示例：

```
{
  "reference_no": "HHWEW0007000006YQ"
}
```

paramsJson参数:

| 参数名 | 数据类型 | 是否必填 | 说明 |
|--------------|--------|---------|----------------|
| reference_no | string | Require | 客户参考号（或者系统运单号） |

response XML示例:

成功返回示例:

```
<?xml version="1.0" encoding="UTF-8"?>
<SOAP-ENV:Envelope xmlns:SOAP-ENV="http://schemas.xmlsoap.org/soap/envelope/" xmlns:ns1="http://www.example.org/Ec/">
  <SOAP-ENV:Body>
    <ns1:callServiceResponse>
      <response>{"ask": "Success", "message": "Success", "reference_no": "HHWEW0007000006YQ", "data": {"shipping_method": "PK0032", "country_code": "ES", "reference_no": "WWW3THHF5S25A13D416", "shipper_hawbcode": "HHWEW0007000006YQ", "shipping_method_no": "L0715812132CND664", "order_weight": "0.000", "order_pieces": "1", "buyer_id": "", "modify_date": "2020-01-08 15:03:27", "mail_cargo_type": "4", "insurance_value": "0.000", "Consignee": {"consignee_countrycode": "ES", "consignee_company": "", "consignee_province": "aa", "consignee_nam
```

```
e":"sdg","consignee_city":"dfh","consignee_telephone":"1212521","consigne
e_mobile":"","consignee_postcode":"","consignee_email":"","consignee_stre
et":"SDAGSDGSDG","consignee_street2":"","consignee_street3":"","consignee
_certificatetype":"","consignee_certificatecode":"","consignee_credential
s_period":"","consignee_doorplate":"","consignee_taxno":"AABBCC008"},"Shi
pper":{"shipper_name":"hh cai","shipper_company":"","shipper_countrycode"
:"CN","shipper_province":"GUANGDONG","shipper_city":"SHENZHEN","shipper_s
treet":"pinghu 55 SHENZHEN GUANGDONG","shipper_postcode":"518000","shippe
r_areacode":"","shipper_telephone":"18011911234","shipper_mobile":"180119
11234","shipper_email":"","shipper_fax":""},"ItemArr":[{"invoice_cnname":
"手机壳","invoice_enname":"sd","unit_code":"PCE","invoice_weight":"1.000",
"invoice_quantity":"1","invoice_totalcharge":"3.33","invoice_totalWeight"
:"1.000","invoice_currencycode":"USD","hs_code":"","invoice_note":"","inv
oice_url":"","sku":"4644392","sku_audit_status":"","CertificateRemark":"","
HSTaxrate":"0.00000","type_code":"","box_no":"U001","Material":"","ASI
N":"","invoice_function":"","invoice_brand":"","invoice_unitcharge":"3.3
3"}]]},"time_cost(s)":"0.27301597595215"}</response>
</ns1:callServiceResponse>
</SOAP-ENV:Body>
</SOAP-ENV:Envelope>
```

失败返回示例:

```
<?xml version="1.0" encoding="UTF-8"?>
<SOAP-ENV:Envelope xmlns:SOAP-ENV="http://schemas.xmlsoap.org/soap/envelo
pe/" xmlns:ns1="http://www.example.org/Ec/">
  <SOAP-ENV:Body>
    <ns1:callServiceResponse>
      <response>{"ask":"Failure","message":"订单不存在","reference_n
o":"HHWEW0007000006YKQ","time_cost(s)":"0.22101211547852"}</response>
    </ns1:callServiceResponse>
  </SOAP-ENV:Body>
</SOAP-ENV:Envelope>
```

response参数:

| 参数名 | 数据类型 | 说明 |
|--------------|--------|---------------------|
| ask | string | 参考公共请求参数中response参数 |
| message | string | 参考公共请求参数中response参数 |
| reference_no | string | 客户单号 |
| data | string | 数据内容(二维数组) |

| | | |
|----------|--------|------------------|
| data | string | 数据内容(二维数组) |
| 参数名 | 数据类型 | 说明 |
| err_code | Object | 参考公共请求参数中Error格式 |

data参数:

| 参数名 | 数据类型 | 说明 |
|--------------------|--------------|--|
| shipping_method | string | 配送方式 |
| country_code | string | 收件人国家二字码 |
| reference_no | string | 客户参考号 |
| shipper_hawbcode | string | 运单号 |
| shipping_method_no | string | 服务商单号 |
| order_weight | float | 订单重量, 单位KG, 默认为0.2 |
| order_pieces | int | 外包装件数,默认1 |
| buyer_id | string | 买家ID |
| modify_date | string | 修改时间 |
| mail_cargo_type | string | 包裹申报种类（1-Gif礼品； 2-CommercialSample商品货样； 3-Document文件； 4-Other其他），默认4 |
| insurance_value | float | 投保金额,币种USD |
| Consignee | Object | 收件人信息 |
| Shipper | Object | 发件人信息 |
| ItemArr | Object/Array | 海关申报信息 |

Consignee参数:

| 参数名 | 数据类型 | 说明 |
|-----------------------|--------|----------|
| consignee_countrycode | string | 收件人国家二字码 |
| consignee_company | string | 收件人公司名 |
| consignee_province | string | 收件人省 |

| 参数名 | 数据类型 | 说明 |
|---------------------|--------|-------|
| consignee_name | string | 收件人姓名 |
| consignee_city | string | 收件人城市 |
| consignee_telephone | string | 收件人电话 |
| consignee_mobile | string | 收件人手机 |
| consignee_postcode | string | 收件人邮编 |
| consignee_email | string | 收件人邮箱 |

| | | |
|------------------------------|--------|--------------------|
| consignee_street | string | 收件人地址1 |
| consignee_street2 | string | 收件人地址2 |
| consignee_street3 | string | 收件人地址3 |
| consignee_certificatetype | string | 证件类型 ID:身份证 PP:护照 |
| consignee_certificatecode | string | 证件号码 |
| consignee_credentials_period | string | 有效期,格式: 2014-04-15 |
| consignee_doorplate | string | 收件人名牌号 |
| consignee_taxno | string | 收件人税号 |

Shipper参数:

| 参数名 | 数据类型 | 说明 |
|---------------------|--------|----------|
| shipper_name | string | 发件人姓名 |
| shipper_company | string | 发件人公司名 |
| shipper_countrycode | string | 发件人国家二字码 |
| shipper_province | string | 发件人省 |
| shipper_city | string | 发件人城市 |
| shipper_street | string | 发件人地址 |

| 参数名 | 数据类型 | 说明 |
|-------------------|--------|-------|
| shipper_postcode | string | 发件人邮编 |
| shipper_areacode | string | 区域代码 |
| shipper_telephone | string | 发件人电话 |
| shipper_mobile | string | 发件人手机 |
| shipper_email | string | 发件人邮箱 |
| shipper_fax | string | 发件人传真 |

ItemArr参数:

| 参数名 | 数据类型 | 说明 |
|----------------------|--------|-----------------------------------|
| invoice_cnname | string | 中文海关申报品名 |
| invoice_enname | string | 海关申报品名 |
| unit_code | string | 单位(MTR(米), PCE(件), SET(套)), 默认PCE |
| invoice_weight | float | 申报重量, 单位KG, 精确到三位小数。 |
| invoice_quantity | int | 数量 |
| invoice_totalcharge | float | 总价 |
| invoice_totalWeight | float | 总重量 |
| invoice_currencycode | string | 申报币种, 默认为USD(美元) |
| hs_code | string | 海关协制编号 |
| invoice_note | string | 配货信息 |
| invoice_url | string | 销售地址 |
| sku | string | 产品SKU编码 |
| invoice_unitcharge | float | 单价 |

feeTrail (运费试算)

简要描述：

运费试算接口

service名称:

feeTrail

paramsJson示例：

```
{
  "country_code": "US",
  "weight": "1",
  "length": "1",
  "width": "1",
  "height": "1"
}
```

paramsJson参数:

| 参数名 | 数据类型 | 是否必填 | 说明 |
|--------------|--------|---------|----------|
| country_code | string | Require | 国家二字码 |
| weight | float | Require | 订单重量(KG) |
| length | float | Option | 包裹长(CM) |
| width | float | Option | 包裹宽(CM) |
| height | float | Option | 包裹高(CM) |

response XML示例:

成功返回示例:

```
<?xml version="1.0" encoding="UTF-8"?>
<SOAP-ENV:Envelope xmlns:SOAP-ENV="http://schemas.xmlsoap.org/soap/envelope/" xmlns:ns1="http://www.example.org/Ec/">
  <SOAP-ENV:Body>
    <ns1:callServiceResponse>
      <response>{"ask":"Success","message":"Success","data":[{"ChargeWeight":"1.000","Effectiveness":"3-7","FreightCostFee":"","FreightFee":"117.22","FuelFee":"21.39","InsuranceFee":"0.00","OtherFee":"1.00","Pr_id":"11983","ProductSort":"3","RegisteredFee":"0.00","Remark":"1、报价不含油不含税、海关罚款、仓储费以及收件人责任所引起的退件费等；2、偏远地区的快件需加收偏远地区附加费，标准为4.6港币/KG，最低收费为230港币/每票,偏远地区附加费须另加燃油附加费；3、高风险地区附加费:200HKD/票（需加燃油，文件和包裹都适用，具体涉及国家请查看报价表）。","ServiceCnName":"HKDHL-代理价","ServiceCode":"HKDHLDLJ","ServiceEnName":"HKDHLDLJ","TotalFee":"139.61","Traceability":"Y","VolumeCharge":"5000","m_ServiceCode":"HKDHLDLJ"}, {"ChargeWeight":"1.000","Effectiveness":"3-7","FreightCostFee":"","FreightFee":"118.32","FuelFee":"21.59","InsuranceFee":"0.00","OtherFee":"1.00","Pr_id":"11984","ProductSort":"3","RegisteredFee":"0.00","Remark":"","ServiceCnName":"HKDHL-敏感价","ServiceCode":"HLDHLMGJ","ServiceEnName":"HKDHLMGJ","TotalFee":"140.91","Traceability":"Y","VolumeCharge":"5000","m_ServiceCode":"HLDHLMGJ"}, {"ChargeWeight":"1.000","Effectiveness":"3-7","FreightCostFee":"","FreightFee":"107.15","FuelFee":"19.55","InsuranceFee":"0.00","OtherFee":"0.00","Pr_id":"3050","ProductSort":"2","RegisteredFee":"0.00","Remark":"1、报价不含油不含税；2、偏远地区是否请自行先查询，我司不代为查询。目的地去往偏远地区的快件需加收偏远地区附加费，标准为RMB3.2/KG，每票最低收费为RMB180/票（文件特惠价请看当面表格说明）偏远地区附加费须另行收取燃油附加费，发货后6个月内有效，官网能查询到偏远地区我司不提供DHL账单。","ServiceCnName":"深圳DHL小货价","ServiceCode":"SZDHLXHJ","ServiceEnName":"SZDHLXHJ","TotalFee":"126.7","Traceability":"Y","VolumeCharge":"5000","m_ServiceCode":"SZDHLXHJ"}, {"ChargeWeight":"1.0","Effectiveness":"7-20","FreightCostFee":"","FreightFee":"63.25","FuelFee":"0.00","InsuranceFee":"0.00","OtherFee":"0.00","Pr_id":"11647","ProductSort":"1","RegisteredFee":"0.00","Remark":"1、该渠道可以接固体化妆品，乳膏状化妆品，磁性支架，蓝牙耳机，不带烟油电子烟，泡沫盒（较重）；2、部分国家可接内置电池及少量配套电池，系统需要分开下单，分开包装，分开交货（详细查看报价表）；3、面单要求：10CM*10CM,面单要干净整洁，条码精度要大于300DPI，须用自粘型热敏纸张打印面单。","ServiceCnName":"深圳平邮","ServiceCode":"SZPYCP","ServiceEnName":"SZPYCP","TotalFee":"63.25","Traceability":"Y","VolumeCharge":"","m_ServiceCode":"SZPYCP"}, {"ChargeWeight":"1.0","Effectiveness":"7-20","FreightCostFee":"","FreightFee":"63.25","FuelFee":"0.00","InsuranceFee":"0.00","OtherFee":"0.00","Pr_id":"11649","ProductSort":"1","RegisteredFee":"0.00","Remark":"1、该渠道可以接固体化妆品，乳膏状化妆品，磁性支架，蓝牙耳机，不带烟油电子烟，泡沫盒（较重）；2、部分国家可接内置电池及少量配套电池，系统需要分开下单，分开包装，分开交货（详细查看报价表）；3、面单要求：10CM*10CM,面单要干净整洁，条码精度要大于300DPI，须用自粘型热敏纸张打印面单。","ServiceCnName":"深圳平邮(内置电)","ServiceCode":"PK0043","ServiceEnName":"SZPYDDCP","TotalFee":
```



```

: "63.25", "Traceability": "Y", "VolumeCharge": "", "m_ServiceCode": "PK0043"}, {
"ChargeWeight": "1.0", "Effectiveness": "7-20", "FreightCostFee": "", "FreightFee": "53.00", "FuelFee": "0.00", "InsuranceFee": "0.00", "OtherFee": "0.00", "Pr_id": "11639", "ProductSort": "1", "RegisteredFee": "20.00", "Remark": "1、带电货物需分开下单，分开交货2、本渠道适用于带内置电池产品，包括手机、平板电脑、笔记本电脑、数码相机、电子表、蓝牙键盘、多功能闹钟、无线路由器、电子烟（不含烟油等液体）等内置锂电池产品；3、面单要求：10CM*10CM,面单要干净整洁，条码精度要大于300DPI，须用自粘型热敏纸张打印面单。", "ServiceCnName": "深圳挂号", "ServiceCode": "PK0001", "ServiceEnName": "SZGH", "TotalFee": "73", "Traceability": "Y", "VolumeCharge": "", "m_ServiceCode": "PK0001"}, {"ChargeWeight": "1.0", "Effectiveness": "7-20", "FreightCostFee": "", "FreightFee": "53.00", "FuelFee": "0.00", "InsuranceFee": "0.00", "OtherFee": "0.00", "Pr_id": "11641", "ProductSort": "1", "RegisteredFee": "20.00", "Remark": "1、带电货物需分开下单，分开交货2、本渠道适用于带内置电池产品，包括手机、平板电脑、笔记本电脑、数码相机、电子表、蓝牙键盘、多功能闹钟、无线路由器、电子烟（不含烟油等液体）等内置锂电池产品；3、面单要求：10CM*10CM,面单要干净整洁，条码精度要大于300DPI，须用自粘型热敏纸张打印面单。", "ServiceCnName": "深圳挂号(内置电)", "ServiceCode": "PK0042", "ServiceEnName": "SZGHDDCP", "TotalFee": "73", "Traceability": "Y", "VolumeCharge": "", "m_ServiceCode": "PK0042"}, {"ChargeWeight": "1.0", "Effectiveness": "", "FreightCostFee": "", "FreightFee": "63.25", "FuelFee": "0.00", "InsuranceFee": "0.00", "OtherFee": "0.00", "Pr_id": "11675", "ProductSort": "0", "RegisteredFee": "0.00", "Remark": "", "ServiceCnName": "湖南平邮", "ServiceCode": "PK0247", "ServiceEnName": "HNPPYC", "TotalFee": "63.25", "Traceability": "N", "VolumeCharge": "", "m_ServiceCode": "PK0247"}, {"ChargeWeight": "1.0", "Effectiveness": "7-20", "FreightCostFee": "", "FreightFee": "63.25", "FuelFee": "0.00", "InsuranceFee": "0.00", "OtherFee": "0.00", "Pr_id": "11652", "ProductSort": "0", "RegisteredFee": "0.00", "Remark": "1、该渠道可以接固体化妆品，乳膏状化妆品，磁性支架，蓝牙耳机，不带烟油电子烟，泡沫盒（较重）；2、部分国家可接内置电池及少量配套电池，系统需要分开下单，分开包装，分开交货（详细查看报价表）；3、面单要求：10CM*10CM,面单要干净整洁，条码精度要大于300DPI，须用自粘型热敏纸张打印面单。", "ServiceCnName": "深圳平邮(纽扣电)", "ServiceCode": "PK0078", "ServiceEnName": "SZPYNKD", "TotalFee": "63.25", "Traceability": "Y", "VolumeCharge": "", "m_ServiceCode": "PK0078"}, {"ChargeWeight": "1.0", "Effectiveness": "7-20", "FreightCostFee": "", "FreightFee": "63.25", "FuelFee": "0.00", "InsuranceFee": "0.00", "OtherFee": "0.00", "Pr_id": "10906", "ProductSort": "0", "RegisteredFee": "0.00", "Remark": "1、该渠道可以接固体化妆品，乳膏状化妆品，磁性支架，蓝牙耳机，不带烟油电子烟，泡沫盒（较重）；2、部分国家可接内置电池及少量配套电池，系统需要分开下单，分开包装，分开交货（详细查看报价表）；3、面单要求：10CM*10CM,面单要干净整洁，条码精度要大于300DPI，须用自粘型热敏纸张打印面单。", "ServiceCnName": "线上-深圳平邮(WISH)", "ServiceCode": "XSSZPYCP", "ServiceEnName": "XSSZPYCP", "TotalFee": "63.25", "Traceability": "Y", "VolumeCharge": "", "m_ServiceCode": "XSSZPYCP"}, {"ChargeWeight": "1.0", "Effectiveness": "3-25", "FreightCostFee": "", "FreightFee": "63.25", "FuelFee": "0.00", "InsuranceFee": "0.00", "OtherFee": "1.00", "Pr_id": "11679", "ProductSort": "0", "RegisteredFee": "0.00", "Remark": "", "ServiceCnName": "华邮宝平邮", "ServiceCode": "PK0218", "ServiceEnName": "EYBPYC", "TotalFee": "64.25", "Traceability": "Y", "VolumeCharge": "", "m_ServiceCode": "PK0218"}, {"ChargeWeight": "1.0", "Ef

```

```

fectiveness":"7-20","FreightCostFee":"","FreightFee":"53.00","FuelFee":
"0.00","InsuranceFee":"0.00","OtherFee":"0.00","Pr_id":"11645","ProductSo
rt":"0","RegisteredFee":"20.00","Remark":"1、带电货物需分开下单，分开交货2、
本渠道适用于带内置电池产品，包括手机、平板电脑、笔记本电脑、数码相机、电子表、蓝
牙键盘、多功能闹钟、无线路由器、电子烟（不含烟油等液体）等内置锂电池产品；3、面
单要求：10CM*10CM,面单要干净整洁，条码精度要大于300DPI，须用自粘型热敏纸张打印
面单。","ServiceCnName":"深圳挂号(纽扣电)","ServiceCode":"PK0079","ServiceE
nName":"SZGHNKDC","TotalFee":"73","Traceability":"Y","VolumeCharge":"","m
_ServiceCode":"PK0079"},{"ChargeWeight":"1.0","Effectiveness":"7-20","Fre
ightCostFee":"","FreightFee":"53.00","FuelFee":"0.00","InsuranceFee":"0.0
0","OtherFee":"0.00","Pr_id":"11656","ProductSort":"0","RegisteredFee":"2
0.00","Remark":"1、带电货物需分开下单，分开交货2、本渠道适用于带内置电池产品，
包括手机、平板电脑、笔记本电脑、数码相机、电子表、蓝牙键盘、多功能闹钟、无线路由
器、电子烟（不含烟油等液体）等内置锂电池产品；3、面单要求：10CM*10CM,面单要干净
整洁，条码精度要大于300DPI，须用自粘型热敏纸张打印面单。","ServiceCnName":"线
上-深圳挂号(WISH)","ServiceCode":"XSSZGHCP","ServiceEnName":"XSSZGHCP","To
talFee":"73","Traceability":"Y","VolumeCharge":"","m_ServiceCode":"XSSZGH
CP"},{"ChargeWeight":"1.0","Effectiveness":"3-25","FreightCostFee":"","Fr
eightFee":"53.00","FuelFee":"0.00","InsuranceFee":"0.00","OtherFee":"1.0
0","Pr_id":"11677","ProductSort":"0","RegisteredFee":"20.00","Remark":"","
","ServiceCnName":"华邮宝挂号","ServiceCode":"PK0219","ServiceEnName":"EYBGH
C","TotalFee":"74","Traceability":"Y","VolumeCharge":"","m_ServiceCode":
"PK0219"},{"ChargeWeight":"1.0","Effectiveness":"3-11","FreightCostFee":
":"","FreightFee":"65.00","FuelFee":"0.00","InsuranceFee":"0.00","OtherFee"
:"0.00","Pr_id":"10616","ProductSort":"0","RegisteredFee":"15.00","Remar
k":"1、限重：0-2公斤，面单的有效期限是15天，面单尺寸10CM*10CM;2、申报价值：如实
填写申报价值，如因申报价值与实际不符带来的风险由发货人承担；3、跟踪查询网站:htt
p://www.hh-exp.com/","ServiceCnName":"广州e邮宝","ServiceCode":"PK0114","S
erviceEnName":"GDEUBC","TotalFee":"80","Traceability":"Y","VolumeCharge":
":"","m_ServiceCode":"PK0114"},{"ChargeWeight":"1.0","Effectiveness":"","Fr
eightCostFee":"","FreightFee":"65.00","FuelFee":"0.00","InsuranceFee":"0.
00","OtherFee":"0.00","Pr_id":"10993","ProductSort":"0","RegisteredFee":
"15.00","Remark":"","ServiceCnName":"湖南e邮宝","ServiceCode":"PK0249","Se
rviceEnName":"HNEUBC","TotalFee":"80","Traceability":"N","VolumeCharge":
":"","m_ServiceCode":"PK0249"},{"ChargeWeight":"1.0","Effectiveness":"","Fr
eightCostFee":"","FreightFee":"65.00","FuelFee":"0.00","InsuranceFee":"0.
00","OtherFee":"0.00","Pr_id":"11059","ProductSort":"0","RegisteredFee":
"15.00","Remark":"","ServiceCnName":"深圳e邮宝(美国)","ServiceCode":"PK010
7","ServiceEnName":"szeubdUS","TotalFee":"80","Traceability":"N","VolumeC
harge":"","m_ServiceCode":"PK0107"},{"ChargeWeight":"1.0","Effectiveness"
:"7-20","FreightCostFee":"","FreightFee":"65.00","FuelFee":"0.00","Insura
nceFee":"0.00","OtherFee":"0.00","Pr_id":"9589","ProductSort":"0","Regist
eredFee":"15.00","Remark":"1、以色列e邮宝限重3Kg，其他国家e邮宝限重2Kg。2、发
往美国/新西兰/巴西/日本/哈萨克斯坦的e邮宝邮件，重量不足50g将按50g收费。3、发往
乌克兰的e邮宝邮件，重量不足10g将按10g收费，4、面单的有效期限是15天，面单尺寸10CM*
10CM。深圳e邮宝Plus","ServiceCnName":"深圳e邮宝Plus","ServiceCode":"PK0164"

```

```

, "ServiceEnName": "SZEYBPLUSC", "TotalFee": "80", "Traceability": "Y", "VolumeCharge": "", "m_ServiceCode": "PK0164"}, {"ChargeWeight": "1.0", "Effectiveness": "7-20", "FreightCostFee": "", "FreightFee": "65.00", "FuelFee": "0.00", "InsuranceFee": "0.00", "OtherFee": "0.00", "Pr_id": "9590", "ProductSort": "0", "RegisteredFee": "15.00", "Remark": "", "ServiceCnName": "深圳e邮宝Plus(带电)", "ServiceCode": "PK0212", "ServiceEnName": "SZEUBPLUSC", "TotalFee": "80", "Traceability": "Y", "VolumeCharge": "", "m_ServiceCode": "PK0212"}, {"ChargeWeight": "1.0", "Effectiveness": "3-15", "FreightCostFee": "", "FreightFee": "65.00", "FuelFee": "0.00", "InsuranceFee": "0.00", "OtherFee": "0.00", "Pr_id": "10019", "ProductSort": "0", "RegisteredFee": "15.00", "Remark": "", "ServiceCnName": "深圳e邮宝-特货", "ServiceCode": "PK0203", "ServiceEnName": "SZEUBTHC", "TotalFee": "80", "Traceability": "Y", "VolumeCharge": "", "m_ServiceCode": "PK0203"}, {"ChargeWeight": "1.0", "Effectiveness": "", "FreightCostFee": "", "FreightFee": "65.00", "FuelFee": "0.00", "InsuranceFee": "0.00", "OtherFee": "0.00", "Pr_id": "10436", "ProductSort": "0", "RegisteredFee": "15.00", "Remark": "", "ServiceCnName": "郑州e邮宝", "ServiceCode": "ZZEUB", "ServiceEnName": "ZZEUB", "TotalFee": "80", "Traceability": "Y", "VolumeCharge": "", "m_ServiceCode": "ZZEUB"}, {"ChargeWeight": "1.0", "Effectiveness": "3-12", "FreightCostFee": "", "FreightFee": "69.92", "FuelFee": "0.00", "InsuranceFee": "0.00", "OtherFee": "0.00", "Pr_id": "8635", "ProductSort": "0", "RegisteredFee": "21.50", "Remark": "1、限重0-2kg2、尺寸要求：长、宽、高长度之和<90cm，最长一边长度<60cm3、面单要求：10CM*10CM,面单要求干净整洁，不能出现中文字样以及MADE IN CHINA4、详细请查看报价表", "ServiceCnName": "华翰航空小包挂号", "ServiceCode": "PK0089", "ServiceEnName": "HHJJXBGHC", "TotalFee": "91.42", "Traceability": "Y", "VolumeCharge": "", "m_ServiceCode": "PK0089"}, {"ChargeWeight": "1.000", "Effectiveness": "3-15", "FreightCostFee": "", "FreightFee": "80.00", "FuelFee": "0.00", "InsuranceFee": "0.00", "OtherFee": "0.00", "Pr_id": "9721", "ProductSort": "0", "RegisteredFee": "15.00", "Remark": "", "ServiceCnName": "美国专线", "ServiceCode": "PK0220", "ServiceEnName": "USZX", "TotalFee": "95", "Traceability": "Y", "VolumeCharge": "7000", "m_ServiceCode": "PK0220"}, {"ChargeWeight": "1.0", "Effectiveness": "", "FreightCostFee": "", "FreightFee": "100.00", "FuelFee": "0.00", "InsuranceFee": "0.00", "OtherFee": "0.50", "Pr_id": "10506", "ProductSort": "0", "RegisteredFee": "0.00", "Remark": "", "ServiceCnName": "美国经济专线平邮-普货", "ServiceCode": "PK0240", "ServiceEnName": "USJJZXPYPHC", "TotalFee": "100.5", "Traceability": "N", "VolumeCharge": "", "m_ServiceCode": "PK0240"}, {"ChargeWeight": "1.0", "Effectiveness": "3-15", "FreightCostFee": "", "FreightFee": "108.00", "FuelFee": "0.00", "InsuranceFee": "0.00", "OtherFee": "0.50", "Pr_id": "10023", "ProductSort": "0", "RegisteredFee": "0.00", "Remark": "1、限重0-2kg2、尺寸要求：长、宽、高长度之和<90cm，最长一边长度<60cm3、面单要求：10CM*10CM,面单要求干净整洁，不能出现中文字样以及MADE IN CHINA4、详细请查看报价表", "ServiceCnName": "华翰航空小包平邮", "ServiceCode": "PK0084", "ServiceEnName": "HH ECONOMIC AIR MAIL - BATTERY", "TotalFee": "108.5", "Traceability": "Y", "VolumeCharge": "", "m_ServiceCode": "PK0084"}, {"ChargeWeight": "1.0", "Effectiveness": "", "FreightCostFee": "", "FreightFee": "110.00", "FuelFee": "0.00", "InsuranceFee": "0.00", "OtherFee": "0.50", "Pr_id": "10508", "ProductSort": "0", "RegisteredFee": "0.00", "Remark": "", "ServiceCnName": "美国经济专线平邮-特货", "ServiceCode": "PK0239", "ServiceEnName":

```

```
"USJJZXPINGYTH", "TotalFee": "110.5", "Traceability": "N", "VolumeCharge": "",
"m_ServiceCode": "PK0239"}, {"ChargeWeight": "1.0", "Effectiveness": "7-20", "FreightCostFee": "", "FreightFee": "330.00", "FuelFee": "0.00", "InsuranceFee": "0.00", "OtherFee": "0.00", "Pr_id": "8817", "ProductSort": "0", "RegisteredFee": "0.00", "Remark": "", "ServiceCnName": "深圳e邮宝-大货", "ServiceCode": "PK0211", "ServiceEnName": "SZEUBBIGC", "TotalFee": "330", "Traceability": "Y", "VolumeCharge": "", "m_ServiceCode": "PK0211"}], "time_cost(s)": "2.5156409740448"}
</response>
</ns1:callServiceResponse>
</SOAP-ENV:Body>
</SOAP-ENV:Envelope>
```

失败返回示例:

```
<?xml version="1.0" encoding="UTF-8"?>
<SOAP-ENV:Envelope xmlns:SOAP-ENV="http://schemas.xmlsoap.org/soap/envelope/" xmlns:ns1="http://www.example.org/Ec/">
  <SOAP-ENV:Body>
    <ns1:callServiceResponse>
      <response>{"ask": "Failure", "message": "试算失败.", "time_cost(s)": "0.28126621246338"}</response>
    </ns1:callServiceResponse>
  </SOAP-ENV:Body>
</SOAP-ENV:Envelope>
```

response参数:

| 参数名 | 数据类型 | 说明 |
|---------|--------|---------------------|
| ask | string | 参考公共请求参数中response参数 |
| message | string | 参考公共请求参数中response参数 |
| data | Object | 数据内容(2维数组) |
| Error | Object | 参考公共请求参数中Error格式 |

data参数:

| 参数名 | 数据类型 | 说明 |
|--------------|-------|------|
| ChargeWeight | float | 计费重量 |

| 参数名 | 数据类型 | 说明 |
|----------------|--------|---------|
| Effectiveness | string | 时效 |
| FreightCostFee | float | （占位用） |
| FreightFee | float | 运费 |
| FuelFee | float | 燃油费 |
| InsuranceFee | float | 保险费 |
| OtherFee | float | 其他费用 |
| Pr_id | int | （占位用） |
| ProductSort | int | 产品排序权重值 |
| RegisteredFee | float | 挂号费 |
| Remark | string | 备注 |
| ServiceCnName | string | 服务中文名称 |
| ServiceCode | string | 产品代码 |
| ServiceEnName | string | 服务英文名称 |
| TotalFee | float | 总费用 |
| Traceability | string | 可追踪 |
| VolumeCharge | float | 体积重计费 |
| m_ServiceCode | string | （占位用） |

interceptOrder （拦截订单）

简要描述：

拦截订单接口

service名称:

interceptOrder

paramsJson示例：

```
{
  "reference_no": "HHWDE0092000008YQ"
}
```

paramsJson参数:

| 参数名 | 数据类型 | 是否必填 | 说明 |
|-----|------|------|----|
|-----|------|------|----|

| | | | |
|--------------|--------|---------|----------------------------------|
| reference_no | string | Require | 系统运单号order_code。注：只有“已预报”状态支持拦截。 |
|--------------|--------|---------|----------------------------------|

response XML示例:

成功返回示例:

```
<?xml version="1.0" encoding="UTF-8"?>
<SOAP-ENV:Envelope xmlns:SOAP-ENV="http://schemas.xmlsoap.org/soap/envelope/" xmlns:ns1="http://www.example.org/Ec/">
  <SOAP-ENV:Body>
    <ns1:callServiceResponse>
      <response>{"ask":"Success","message":"Success","reference_no":"HHWDE0098000004YQ","time_cost(s)":"0.28801608085632"}</response>
    </ns1:callServiceResponse>
  </SOAP-ENV:Body>
</SOAP-ENV:Envelope>
```

```
</SOAP-ENV:Body>
</SOAP-ENV:Envelope>
```

失败返回示例:

```
<?xml version="1.0" encoding="UTF-8"?>
<SOAP-ENV:Envelope xmlns:SOAP-ENV="http://schemas.xmlsoap.org/soap/envelope/" xmlns:ns1="http://www.example.org/Ec/">
  <SOAP-ENV:Body>
    <ns1:callServiceResponse>
      <response>{"ask":"Failure","message":"订单不存在","reference_no":"HHWDE0098000004Y3Q","Error":{"errMessage":"订单不存在","errCode":"5000"},"time_cost(s)":"0.27701592445374"}</response>
    </ns1:callServiceResponse>
  </SOAP-ENV:Body>
</SOAP-ENV:Envelope>
```

response参数:

| 参数名 | 数据类型 | 说明 |
|--------------|--------|---------------------|
| ask | string | 参考公共请求参数中response参数 |
| message | string | 参考公共请求参数中response参数 |
| reference_no | Object | 系统单号 |

| | | |
|-------|--------|------------------|
| Error | Object | 参考公共请求参数中Error格式 |
|-------|--------|------------------|

getOrderFee (订单费用查询)

简要描述：

订单费用查询接口

service名称:

getOrderFee

paramsJson示例：

```
{
  "reference_no": "HHWFL9289000004YQ"
}
```

paramsJson参数:

| 参数名 | 数据类型 | 是否必填 | 说明 |
|--------------|--------|---------|--|
| reference_no | string | Require | 客户单号reference_no（或者系统运单号order_code，或服务商单号shipping_method_no都可以），注意：目前只支持单个单号查询 |

response XML示例:

成功返回示例:

```
<?xml version="1.0" encoding="UTF-8"?>
<SOAP-ENV:Envelope xmlns:SOAP-ENV="http://schemas.xmlsoap.org/soap/envelope/" xmlns:ns1="http://www.example.org/Ec/">
  <SOAP-ENV:Body>
    <ns1:callServiceResponse>
      <response>{"ask": "Success", "message": "Success", "reference_no"
```



```
: "HHWFL9289000004YQ", "data": { "total_price": "0.00", "details": [ { "fee_name": "\u901f\u9012\u8fd0\u8d39", "price": "25.50", "currency": "RMB", "create_date": "2019-10-16 11:20:12"}, { "fee_name": "\u6d4b\u8bd5\u8d39\u7528", "price": "0.07", "currency": "RMB", "create_date": "2019-10-16 11:20:12"}, { "fee_name": "\u6302\u53f7\u8d39", "price": "21.35", "currency": "RMB", "create_date": "2019-10-16 11:20:12"} ] }, "time_cost(s)": "0.3000168800354" }</response>
</ns1:callServiceResponse>
</SOAP-ENV:Body>
</SOAP-ENV:Envelope>
```

失败返回示例:

```
<?xml version="1.0" encoding="UTF-8"?>
<SOAP-ENV:Envelope xmlns:SOAP-ENV="http://schemas.xmlsoap.org/soap/envelope/" xmlns:ns1="http://www.example.org/Ec/">
  <SOAP-ENV:Body>
    <ns1:callServiceResponse>
      <response>{ "ask": "Failure", "message": "Failure", "reference_no": "HHWFL9289000004YQ1", "Error": { "errCode": "50010", "errMessage": "订单不存在, 或运单不属于该客户"}, "time_cost(s)": "0.28201603889465" }</response>
    </ns1:callServiceResponse>
  </SOAP-ENV:Body>
</SOAP-ENV:Envelope>
```

response参数:

| 参数名 | 数据类型 | 说明 |
|--------------|--------|---------------------|
| ask | string | 参考公共请求参数中response参数 |
| message | string | 参考公共请求参数中response参数 |
| reference_no | string | 客户参考号 |
| data | Object | 数据内容(2维数组) |
| Error | Object | 参考公共请求参数中Error格式 |

data参数:

| 参数名 | 数据类型 | 说明 |
|-------------|-------|-----|
| total_price | float | 总费用 |

getOrderFee (订单费用查询)

| 参数名 | 数据类型 | 说明 |
|---------|--------|--------|
| details | Object | 费用明细列表 |

details参数:

| 参数名 | 数据类型 | 说明 |
|-------------|--------|------|
| fee_name | string | 费用名称 |
| price | float | 金额 |
| currency | string | 币种 |
| create_date | string | 创建时间 |

getBillingWeight (获取订单实际计费重)

简要描述：

订单实际计费重接口

service名称:

getBillingWeight

paramsJson示例：

```
{ "codes": [ "HHWIK1102001476YQ", "LY735983048CN" ] }
```

paramsJson参数:

| 参数名 | 数据类型 | 是否必填 | 说明 |
|-------|--------------|---------|--|
| codes | Object/Array | Require | 客户单号reference_no（或者系统运单号order_code，或服务商单号shipping_method_no 都可以） |

response XML示例:

成功返回示例:

```
<?xml version="1.0" encoding="UTF-8"?>
<SOAP-ENV:Envelope xmlns:SOAP-ENV="http://schemas.xmlsoap.org/soap/envelope/" xmlns:ns1="http://www.example.org/Ec/">
  <SOAP-ENV:Body>
    <ns1:callServiceResponse>
      <response>{"ask": "Success", "message": "Success", "Data": [{"Code": "HHWIK1102001476YQ", "chargeweight": "0.301", "message": ""}, {"Code": "LY735983048CN", "chargeweight": "1.000", "message": ""}], "time_cost(s)": "0.078124046325684"}</response>
    </ns1:callServiceResponse>
  </SOAP-ENV:Body>
</SOAP-ENV:Envelope>
```

失败返回示例:

```
<?xml version="1.0" encoding="UTF-8"?>
<SOAP-ENV:Envelope xmlns:SOAP-ENV="http://schemas.xmlsoap.org/soap/envelope/" xmlns:ns1="http://www.example.org/Ec/">
  <SOAP-ENV:Body>
    <ns1:callServiceResponse>
      <response>{"ask": "Success", "message": "Success", "Data": [{"Code": "HHWHL1092000002YQ", "chargeweight": "", "message": "订单还未入库"}, {"Code": "RV561160645CN11", "chargeweight": "", "message": "订单不存在,或运单不属于该客户"}], "time_cost(s)": "0.15624809265137"}</response>
    </ns1:callServiceResponse>
  </SOAP-ENV:Body>
</SOAP-ENV:Envelope>
```

response参数:

| 参数名 | 数据类型 | 说明 |
|---------|--------|---------------------|
| ask | string | 参考公共请求参数中response参数 |
| message | string | 参考公共请求参数中response参数 |
| Data | Object | 数据内容(2维数组) |
| Error | Object | 参考公共请求参数中Error格式 |

Data参数:

| 参数名 | 数据类型 | 说明 |
|--------------|--------|----------|
| Code | string | 单号 |
| chargeweight | float | 计费重 (KG) |
| message | string | 报错信息 |

getLastTrackCode(PDD专用-获取派送商信息)

简要描述：

查询运单入库后实际发货跟踪号以及尾端派送商信息接口

service名称:

getLastTrackCode

paramsJson示例：

```
{
  "reference_no": [ "MGP2211270106791", "HHWEW0007000009YQ" ]
}
```

paramsJson参数:

| 参数名 | 数据类型 | 是否必填 | 说明 |
|--------------|--------|---------|---|
| reference_no | Object | Require | 客户单号reference_no（或者系统运单号order_co 数组,如{ "reference_no":["code1","code2"]} |

response XML示例:

成功返回示例:

```
<?xml version="1.0" encoding="UTF-8"?>
<SOAP-ENV:Envelope xmlns:SOAP-ENV="http://schemas.xmlsoap.org/soap/envelope/" xmlns:ns1="http://www.example.org/Ec/">
  <SOAP-ENV:Body>
    <ns1:callServiceResponse>
      <response>
        { "ask": "Success", "data": [ { "state": "1", "OrderNumber": "MGP2211270096505", "TrackingNumber": "9214490209140407692148", "providerCode": "U  
SPS", "WayBillNumber": "HHWPQ2331002577YQ" }, { "state": "1", "OrderNumber": "MGP2211270106791", "TrackingNumber": "9214490209140406132133", "providerCode":
```

```
"USPS","WayBillNumber":"HHWPQ2331003670YQ"}]], "Error":[], "message":"全部获取成功", "time_cost(s)": "0.07031512260437"}
</response>
</ns1:callServiceResponse>
</SOAP-ENV:Body>
</SOAP-ENV:Envelope>
```

失败返回示例:

```
<?xml version="1.0" encoding="UTF-8"?>
<SOAP-ENV:Envelope xmlns:SOAP-ENV="http://schemas.xmlsoap.org/soap/envelope/" xmlns:ns1="http://www.example.org/Ec/">
  <SOAP-ENV:Body>
    <ns1:callServiceResponse>
      <response>
        {"ask":"Failure","data":[{"state":"0","OrderNumber":"HHWPQ2331002577YQ1","TrackingNumber":"","WayBillNumber":"","msg":"单号：[HHWPQ2331002577YQ1]订单信息不存在"}, {"state":"0","OrderNumber":"MGP221127010679111","TrackingNumber":"","WayBillNumber":"","msg":"单号：[MGP221127010679111]订单信息不存在"}], "Error":[], "message":"全部获取失败", "time_cost(s)": "0.028321027755737"}
      </response>
    </ns1:callServiceResponse>
  </SOAP-ENV:Body>
</SOAP-ENV:Envelope>
```

response参数:

| 参数名 | 数据类型 | 说明 |
|---------|--------|---------------------|
| ask | string | 参考公共请求参数中response参数 |
| message | string | 参考公共请求参数中response参数 |
| data | Object | 数据内容(2维数组) |
| Error | Object | 参考公共请求参数中Error格式 |

data参数:

| 参数名 | 数据类型 | 说明 |
|-------|------|-----------|
| state | int | 1为成功；0为失败 |

| 参数名 | 数据类型 | 说明 |
|----------------|--------|-----------|
| OrderNumber | string | 客户单号 |
| TrackingNumber | string | 跟踪号 |
| providerCode | string | 尾端轨迹服务商代码 |
| WayBillNumber | string | 系统运单号 |
| msg | string | 错误信息 |

getCargoTrackPdd(PDD专用-轨迹查询)

简要描述：

轨迹查询接口

service名称:

getCargoTrackPdd

paramsJson示例：

```
{
  "codes": [ "HHWDE9344000011YQ", "HHWDE9344000012YQ" ]
}
```

paramsJson参数:

| 参数名 | 数据类型 | 是否必填 | 说明 |
|-------|--------------|---------|---|
| codes | Object/Array | Require | 服务商单号shipping_method_no（或者系统订单号c 数组,如{"codes":["TFL1","TFL2"]} |

注：1、此单号为创建订单时候我司返回的运单号或者追踪单号或者客户单号）

response XML示例:

成功返回示例:

```
<?xml version="1.0" encoding="UTF-8"?>
<SOAP-ENV:Envelope xmlns:SOAP-ENV="http://schemas.xmlsoap.org/soap/envelope/" xmlns:ns1="http://www.example.org/Ec/">
  <SOAP-ENV:Body>
    <ns1:callServiceResponse>
      <response>{"ask":"Success","message":"Success","Data":[{"Code":"HHWQV2359000002YQ","Country_code":"US","New_date":"2022-12-25 14:26:15","Time_zone":"+08:00","New_Comment":"快件到达作业中心","Status":"AF","Err
```



```
or_code":"0000","Detail":[{"Occur_date":"2022-12-25 14:26:15","Occur_time_zone":"+08:00","Status":"AF","Comment":"Has entered the warehouse","track_area":"SHENZHEN"}, {"Occur_date":"2022-12-25 14:07:43","Occur_time_zone":"+08:00","Status":"IR","Comment":"Shipment information received","track_area":"CHINA"}]], "Error":[], "time_cost(s)":"0.032227039337158"}</response>
</ns1:callServiceResponse>
</SOAP-ENV:Body>
</SOAP-ENV:Envelope>
```

失败返回示例:

```
<?xml version="1.0" encoding="UTF-8"?>
<SOAP-ENV:Envelope xmlns:SOAP-ENV="http://schemas.xmlsoap.org/soap/envelope/" xmlns:ns1="http://www.example.org/Ec/">
  <SOAP-ENV:Body>
    <ns1:callServiceResponse>
      <response>{"ask":"Success","message":"Success","Data":[{"Code":"Haaaaaaaa000002YQ","Country_code":"","New_date":"","New_Comment":"","Status":"","Error_code":"0001","Detail":[]}], "Error":[], "time_cost(s)":"0.030274868011475"}</response>
    </ns1:callServiceResponse>
  </SOAP-ENV:Body>
</SOAP-ENV:Envelope>
```

```
<?xml version="1.0" encoding="UTF-8"?>
<SOAP-ENV:Envelope xmlns:SOAP-ENV="http://schemas.xmlsoap.org/soap/envelope/" xmlns:ns1="http://www.example.org/Ec/">
  <SOAP-ENV:Body>
    <ns1:callServiceResponse>
      <response>{"ask":"Failure","message":"","Data":[], "Error":{"cnMessage":"单号不能为空","enMessage":"Order Code. can not be empty"}, "time_cost(s)":"0.063003063201904"}</response>
    </ns1:callServiceResponse>
  </SOAP-ENV:Body>
</SOAP-ENV:Envelope>
```

response参数:

| 参数名 | 数据类型 | 说明 |
|-----|--------|---------------------|
| ask | string | 参考公共请求参数中response参数 |

| 参数名 | 数据类型 | 说明 |
|---------|--------|---------------------|
| message | string | 参考公共请求参数中response参数 |
| Data | Object | 数据内容(2维数组) |
| Error | Object | 参考公共请求参数中Error格式 |

Data参数:

| 参数名 | 数据类型 | 说明 |
|--------------|--------|------------------------------------|
| Code | string | 单号 |
| Country_code | string | 目的国家代码 |
| New_date | string | 最新的轨迹时间+时区，格式为：YYYY-MM-DD HH:MM:SS |
| Time_zone | string | 时区，格式：+08:00 |
| New_Comment | string | 最新的轨迹内容 |
| Status | string | 轨迹状态码 |
| Detail | Object | 轨迹明细内容(2维数组) |

Detail参数:

| 参数名 | 数据类型 | 说明 |
|-----------------|--------|--------------|
| Occur_date | string | 轨迹发生时间 |
| Occur_time_zone | string | 时区，格式：+08:00 |
| Status | string | 轨迹状态 |
| Comment | string | 轨迹内容 |
| track_area | string | 发生地点全称 |

轨迹状态代码对应表:

| 轨迹状态码 | 节点中文描述 | 节点英文描述 |
|-------|---------|--------------------------------------|
| IR | 电子信息已收到 | Shipment information received |
| AF | 已入仓 | Has entered the warehouse |
| DF | 已出仓 | Out warehouse |
| IA | 已上网 | Internet Access |
| WB | 到达中转站 | Arrived at Transit Facility |
| WD | 离开中转站 | Departed from Transit Facility |
| GG | 已过港 | Have a port |
| BG | 已报关 | Have out customs clearance |
| AP | 已交航 | Air Transport |
| QF | 已起飞 | Has been take off |
| LD | 已落地 | Have fall to the ground |
| QG | 清关中 | Customs clearance in progress |
| YG | 已清关 | Have customs clearance |
| YQ | 已提取 | Already extracted |
| DR | 到达目的地 | Destination Reached |
| CA | 到达尾程承运商 | arrived at last mile sorting center |
| CB | 离开尾程承运商 | Leaving the terminal transfer center |
| ND | 运输中 | Normal delivery |
| CC | 派送妥投 | Delivered |
| UE | 退件 | Untread Expressage |
| PB | 到达待取 | Arrival to be picked up |
| AC | 清关异常 | Abnormal customs clearance |
| FI | 签收失败 | Delivery failed |
| DS | 已丢失 | The package has been lost |

createFbaOrder (创建FBA订单接口)

简要描述：

创建FBA订单接口（注意：小包不是调用此接口）

service名称:

createFbaOrder

paramsJson示例：

```
{
  "reference_no": "WWTEST202001084545a1",
  "shipping_method": "PK0331",
  "order_weight": 1,
  "length": 1,
  "width": 1,
  "height": 1,
  "Warehouse": {
    "consignee_countrycode": "US",
    "consignee_street": "19 N Long Ave",
    "consignee_street2": "",
    "consignee_street3": "",
    "consignee_doorplate": "101",
    "consignee_name": "Xiao Cai",
    "consignee_telephone": "958465448",
    "consignee_postcode": "60644-3224",
    "consignee_province": "Illinois",
    "consignee_city": "Chicago",
    "consignee_taxno": "TA2020181245",
    "consignee_email": "9586645845@qq.com"
  },
  "Shipper": {
    "shipper_countrycode": "CN",
    "shipper_province": "GUANGDONG",
    "shipper_city": "SHENZHEN",
    "shipper_street": "pinghu 55 SHENZHEN GUANGDONG",
    "shipper_postcode": "518000",
    "shipper_name": "hh cai",
    "shipper_telephone": "9586458745",
  }
}
```

```

    "shipper_mobile": "18011911234",
    "shipper_taxno": "FAFA8181AA"
  },
  "BoxArr":
  [
    {
      "fba_box_no": "FBA15GTZ23DZU00001",
      "box_weight": 2,
      "box_length": 3,
      "box_width": 4,
      "box_height": 5,
      "ItemArr": [
        {
          "invoice_cname": "zhongwenming",
          "invoice_ename": "yingwenming",
          "invoice_weight": 1,
          "invoice_quantity": 1,
          "invoice_unitcharge": 11,
          "invoice_currencycode": "USD",
          "hs_code": 1234567890,
          "invoice_url": "http://www.amz.com/invoice_url",
          "sku": "testsku",
          "material": "glass",
          "invoice_function": "play",
          "ASIN": "ASINtestsku"
        },
        {
          "invoice_cname": "zhongwenming2",
          "invoice_ename": "yingwenming2",
          "invoice_weight": 1,
          "invoice_quantity": 2,
          "invoice_unitcharge": 22,
          "invoice_currencycode": "USD",
          "hs_code": 1234567890,
          "invoice_url": "http://www.amz.com/invoice_url",
          "sku": "testsku2",
          "material": "glass",
          "invoice_function": "play",
          "ASIN": "ASINtestsku2"
        }
      ]
    },
    {
      "fba_box_no": "FBA15GTZ23DZU00002",
      "box_weight": 2,
      "box_length": 3,

```

```
        "box_width": 4,
        "box_height": 5,
        "ItemArr": [
            {
                "invoice_cname": "zhongwenming",
                "invoice_ename": "yingwenming",
                "invoice_weight": 1,
                "invoice_quantity": 1,
                "invoice_unitcharge": 11,
                "invoice_currencycode": "USD",
                "hs_code": 1234567890,
                "invoice_url": "http://www.amz.com/invoice_url",
                "sku": "testsku",
                "material": "glass",
                "invoice_function": "play",
                "ASIN": "ASINtestsku"
            },
            {
                "invoice_cname": "zhongwenming2",
                "invoice_ename": "yingwenming2",
                "invoice_weight": 1,
                "invoice_quantity": 2,
                "invoice_unitcharge": 22,
                "invoice_currencycode": "USD",
                "hs_code": 1234567890,
                "invoice_url": "http://www.amz.com/invoice_url",
                "sku": "testsku2",
                "material": "glass",
                "invoice_function": "play",
                "ASIN": "ASINtestsku2"
            }
        ]
    }
}
```

paramsJson参数:

| 参数名 | 数据类型 | 是否必填 | 说明 |
|--------------|--------|---------|----------------------------------|
| reference_no | string | Require | 客户参考号(客户自定义单号，不能重复，需唯一) |
| | | | 配送方式（产品代码） 可以通过“获取配送方式”接口获取列表 |

| | | | |
|------------------------|----------------|-----------------|---|
| 参数名 shipping_method | 数据类型 string | 是否必填 Require | 说明 也可以访问我司产品代码网站 https://www.hh-exp.cn/ProductCode/index.php 手工查询 |
| country_code | string | Require | 收件人国家二字码 |
| extra_service | string | Option | 附加服务代码， 每个以英文分号“;”隔开 |

| | | | |
|-----------------|--------------|---------|---|
| order_weight | float | Require | 订单重量，单位KG |
| order_pieces | int | Option | 外包装件数,默认1（ 小包默认值1即可 , 发FBA空海运等一票货多箱的时候才需 要根据情况设置） 这个字段不是数量不要传错。 |
| insurance_value | float | Option | 投保金额，默认RMB |
| mail_cargo_type | string | Option | 包裹申报种类（1-Gif礼品；2- CommercialSample商品货样；3- Document文件；4-Other其他。 默认4） |
| length | float | Option | 长，单位cm，默认1 |
| width | float | Option | 宽，单位cm，默认1 |
| height | float | Option | 高，单位cm，默认1 |
| Warehouse | Object | Require | 亚马逊收件仓地址信息 |
| Shipper | Object | Require | 发件人信息 |
| BoxArr | Object/Array | Require | 海关申报信息 |

Warehouse参数

| 参数名 | 数据类型 | 是否必填 | 说明 |
|--------------------|--------|--------|--------|
| consignee_company | string | Option | 收件人公司名 |
| consignee_province | string | Option | 收件人省 |

| 参数名 | 数据类型 | 是否必填 | 说明 |
|--------------------|--------|---------|--------|
| consignee_province | string | Option | 收件人省 |
| consignee_city | string | Option | 收件人城市 |
| consignee_street | string | Require | 收件人地址1 |
| consignee_street2 | string | Option | 收件人地址2 |
| consignee_street3 | string | Option | 收件人地址3 |

| | | | |
|------------------------------|--------|---------|---|
| consignee_postcode | string | Option | 收件人邮编 |
| consignee_name | string | Require | 收件人姓名 |
| consignee_telephone | string | Option | 收件人电话 |
| consignee_mobile | string | Option | 收件人手机 |
| consignee_email | string | Option | 收件人邮箱 |
| consignee_certificatetype | string | Option | 证件类型（ID-身份证；PP-护照） |
| consignee_certificatecode | string | Option | 证件号码 |
| consignee_credentials_period | string | Option | 证件有效期， 格式：2014-04-15 |
| consignee_doorplate | string | Option | 收件人门牌号（ 注意：除一些特殊专线产品要求单独上传门牌号外，门牌号直接放地址里面即可无需单独放到此字段 ） |
| consignee_taxno | string | Option | 收件人税号（VAT税号） |
| IOSS | string | Option | 欧盟税号（ioss税号） |

Shipper参数

| 参数名 | 数据类型 | 是否必填 | 说明 |
|---------------------|--------|---------|----------|
| shipper_company | string | Option | 发件人公司名 |
| shipper_countrycode | string | Require | 发件人国家二字码 |

| 参数名 | 数据类型 | 是否必填 | 说明 |
|------------------|--------|---------|-------|
| shipper_province | string | Require | 发件人省 |
| shipper_city | string | Require | 发件人城市 |
| shipper_street | string | Require | 发件人地址 |
| shipper_postcode | string | Require | 发件人邮编 |

| | | | |
|-------------------|--------|---------|-----------------|
| shipper_areacode | string | Option | 区域代码 |
| shipper_name | string | Require | 发件人姓名 |
| shipper_telephone | string | Require | 发件人电话 |
| shipper_mobile | string | Require | 发件人手机 |
| shipper_email | string | Option | 发件人邮箱 |
| shipper_fax | string | Option | 发件人传真 |
| order_note | string | Option | 订单备注 |
| shipper_taxno | string | Option | 发件人税号（发件人VAT税号） |

BoxArr参数

| 参数名 | 数据类型 | 是否必填 | 说明 |
|------------|--------|---------|-------------|
| fba_box_no | string | Require | FBA箱号 |
| box_weight | string | Require | 箱子重，单位kg |
| box_length | string | Require | 箱子长，单位cm |
| box_width | string | Require | 箱子宽，单位cm |
| box_height | string | Require | 箱子高，单位cm |
| ItemArr | Object | Require | 详见ItemArr参数 |

ItemArr参数

| | | | |
|--|--|--|--|
| | | | |
|--|--|--|--|

| 参数名 参数名 | 数据类型 数据类型 | 是否必填 是否必填 | 说明 说明 |
|----------------|--------------|--------------|----------|
| invoice_enname | string | Require | 英文海关申报品名 |
| invoice_cnname | string | Option | 中文海关申报品名 |

| | | | |
|----------------------|--------|---------|--|
| invoice_weight | float | Require | 申报重量，单位KG， 精确到三位小数。 |
| invoice_quantity | int | Require | 数量 |
| unit_code | string | Option | 单位(MTR-米；PCE-件；SET-套)， 默认PCE |
| invoice_unitcharge | float | Require | 单价 |
| invoice_currencycode | string | Option | 申报币种，不传值默认为USD(美元)； USD-美元,AUD-澳元,CAD-加元,EUR- 欧元,GBP-英镑,HKD-港币,MXN- 墨西哥元,RMB-人民币,RUB- 俄罗斯卢布,SGD-新加坡元 |
| hs_code | string | Option | 海关协制编号(海关编码) |
| invoice_note | string | Option | 配货信息 |
| invoice_url | string | Option | 产品销售地址（销售链接） |
| sku | string | Option | 产品SKU编码 |
| material | string | Option | 申报材质 |
| invoice_function | string | Option | 用途 |

response XML示例:

成功返回示例:

```
<?xml version="1.0" encoding="UTF-8"?>
<SOAP-ENV:Envelope xmlns:SOAP-ENV="http://schemas.xmlsoap.org/soap/envelope/" xmlns:ns1="http://www.example.org/Ec/">
  <SOAP-ENV:Body>
    <ns1:callServiceResponse>
      <response>{"ask": "Success", "message": "Success", "reference_no"
```

```
: "WWTEST202001084549", "shipping_method_no": "LW423745051CN", "order_code":  
"HHWEW0008000011YQ", "track_status": "1", "sender_info_status": "1", "ODA": "",  
"agent_number": "496409", "time_cost(s)": "3.8042180538177"}</response>  
  </ns1:callServiceResponse>  
</SOAP-ENV:Body>  
</SOAP-ENV:Envelope>
```

失败返回示例:

```
<?xml version="1.0" encoding="UTF-8"?>  
<SOAP-ENV:Envelope xmlns:SOAP-ENV="http://schemas.xmlsoap.org/soap/envelope/"  
  xmlns:ns1="http://www.example.org/Ec/">  
  <SOAP-ENV:Body>  
    <ns1:callServiceResponse>  
      <response>{"ask": "Failure", "message": "服务异常：订单数据不合法",  
        "reference_no": "WWTEST202001084545", "Error": {"errMessage": "参考单号已存在  
[WWTEST202001084545]", "errCode": "ORDER_REFER_ISEXISTS"}, "time_cost(s)":  
        "0.92805314064026"}</response>  
    </ns1:callServiceResponse>  
  </SOAP-ENV:Body>  
</SOAP-ENV:Envelope>
```

response参数:

| 参数名 | 数据类型 | 说明 |
|--------------------|--------|---|
| ask | string | 参考公共请求参数中response参数 |
| message | string | 参考公共请求参数中response参数 |
| reference_no | string | 客户单号 |
| shipping_method_no | string | 服务商单号(追踪单号\尾程派送单号)，如： RV507879168CN ,默认取此单号 |
| order_code | string | 华翰系统订单号，系统生成的唯一单号，如： HHWCO0296000051YQ，如果需要华翰运单号， 可以获取这个字段， 此单号也可以17TRACK或华翰官网（hh-exp.com） 查询全程轨迹 |
| track_status | string | track_status（1-已产生跟踪号，2- 等待后续更新跟踪号,3-不需要跟踪号） — 暂未启用此功能 |

| | | |
|--------------------|--------|---|
| sender_info_status | string | 是否需要分配发件人地址 (0-是, 1-否) |
| ODA | string | 是否需要ODA检验 (Y-是) |
| agent_number | string | 渠道换单号 |
| Error | Object | 参考公共请求参数中Error格式 (注意 : 获取报错信息是 message +errMessage 才是完整的报错提示) |

batchGetDeliveryProof(批量获取发货证明)

简要描述：

批量获取标签接口

注：暂时批量获取发货证明的接口

service名称:

batchGetDeliveryProof

paramsJson示例：

```
{
  "reference_nos":["HHWAA4236000002YQ","HHWAA4236000001YQ"],
  "labelName": "发货证明"
}
```

paramsJson参数:

| 参数名 | 数据类型 | 是否必填 | 说明 |
|---------------|--------|---------|---|
| reference_nos | object | Require | 客户参考号（或者 系统运单号order_code 或服务商追踪号shipping_method_no ） 注意：一次性最多支持10票批量生成，超过数量容易出现获取失败或超时等错误，建议一次获取3票以内 |
| labelName | string | Require | 发货证明 |

response XML示例:

成功返回示例:

```
<?xml version="1.0" encoding="UTF-8"?>
<SOAP-ENV:Envelope xmlns:SOAP-ENV="http://schemas.xmlsoap.org/soap/envelo
```

```
pe/" xmlns:ns1="http://www.example.org/Ec/">
  <SOAP-ENV:Body>
    <ns1:callServiceResponse>
      <response>{"ask":"Success","message":"Success","data":[{"url":
:"http://120.79.252.215:10001/PDF/1be397ef-901f-403d-a770-85a4dcb30ee7.pdf",
"reference_no":"HHWCY4239000001YQ"}, {"url":"http://120.79.252.215:1000
1/PDF/c06de41f-aa11-4f46-a941-299e7c1dd93d.pdf", "reference_no":"HHWCY4237
000002YQ"}], "time_cost(s)": "0.11023712158203"}</response>
    </ns1:callServiceResponse>
  </SOAP-ENV:Body>
</SOAP-ENV:Envelope>
```

失败返回示例:

```
<?xml version="1.0" encoding="UTF-8"?>
<SOAP-ENV:Envelope xmlns:SOAP-ENV="http://schemas.xmlsoap.org/soap/envelo
pe/" xmlns:ns1="http://www.example.org/Ec/">
  <SOAP-ENV:Body>
    <ns1:callServiceResponse>
      <response>{"ask":"Failure","message":"","Error":{"errCode":"","
,"errMessage":"全部获取失败"}, "time_cost(s)": "0.10532593727112"}</response
>
    </ns1:callServiceResponse>
  </SOAP-ENV:Body>
</SOAP-ENV:Envelope>
```

response参数:

| 参数名 | 数据类型 | 说明 |
|---------|--------|---------------------|
| ask | string | 参考公共请求参数中response参数 |
| message | string | 参考公共请求参数中response参数 |
| url | string | PDF标签格式URL地址 |
| Error | Object | 参考公共请求参数中Error格式 |

getFbaLabel(批量获取FBA标签)

简要描述：

批量获取FBA标签

注：批量获取FBA标签

service名称:

getFbaLabel

paramsJson示例：

```
{
  "box_nos": [ "HHWAA4236000002YQU0011" ]
}
```

paramsJson参数:

| 参数名 | 数据类型 | 是否必填 | 说明 |
|---------|--------|---------|--|
| box_nos | object | Require | FBA箱号（或者 子单追踪单号） 注意： 一次性最多支持20票批量生成， 超过数量容易出现获取失败或超时等错误 |

response XML示例:

成功返回示例:

```
<?xml version="1.0" encoding="UTF-8"?>
<SOAP-ENV:Envelope xmlns:SOAP-ENV="http://schemas.xmlsoap.org/soap/envelope/" xmlns:ns1="http://www.example.org/Ec/">
  <SOAP-ENV:Body>
    <ns1:callServiceResponse>
      <response>{"ask": "Success", "message": "Success", "data": [{"child_number": "HHWAA4236000002YQU001", "fba_box_no": "fbaboxnosjk11", "child_tra
```

```
ck_number":"HHWAA4236000002YQU001","ol_label_url_ori":"http://192.168.16.21:80/index/get-label/code/HHWAA1291000019YQ"}], "time_cost(s)": "0.13107204437256"}</response>
</ns1:callServiceResponse>
</SOAP-ENV:Body>
</SOAP-ENV:Envelope>
```

失败返回示例:

```
<?xml version="1.0" encoding="UTF-8"?>
<SOAP-ENV:Envelope xmlns:SOAP-ENV="http://schemas.xmlsoap.org/soap/envelope/" xmlns:ns1="http://www.example.org/Ec/">
  <SOAP-ENV:Body>
    <ns1:callServiceResponse>
      <response>{"ask":"Failure","message":"","Error":{"errCode":"","errMessage":"订单号HHWAA4236000002YQU0011不存在, 或者不属于该用户"},"time_cost(s)": "0.12351894378662"}</response>
    </ns1:callServiceResponse>
  </SOAP-ENV:Body>
</SOAP-ENV:Envelope>
```

response参数:

| 参数名 | 数据类型 | 说明 |
|---------|--------|--------------------------------|
| ask | string | 参考公共请求参数中response参数 |
| message | string | 参考公共请求参数中response参数 |
| data | Object | 包含子单号, FBA箱号, 子单追踪单号, PDF标签URL |
| Error | Object | 参考公共请求参数中Error格式 |